
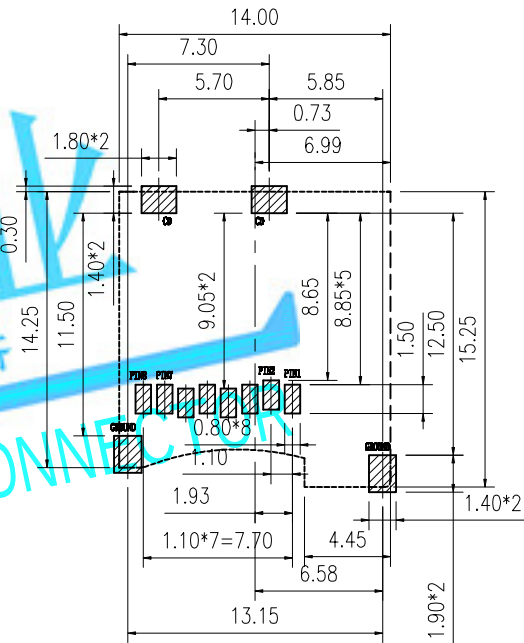
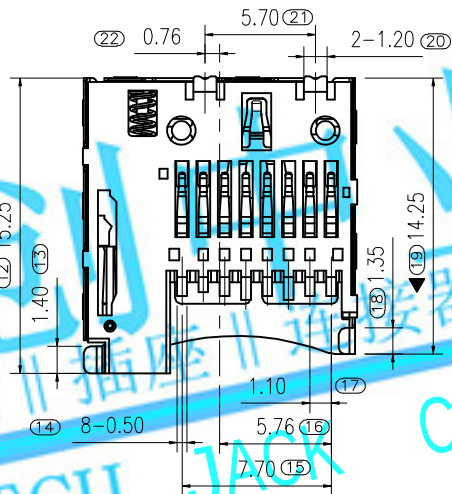


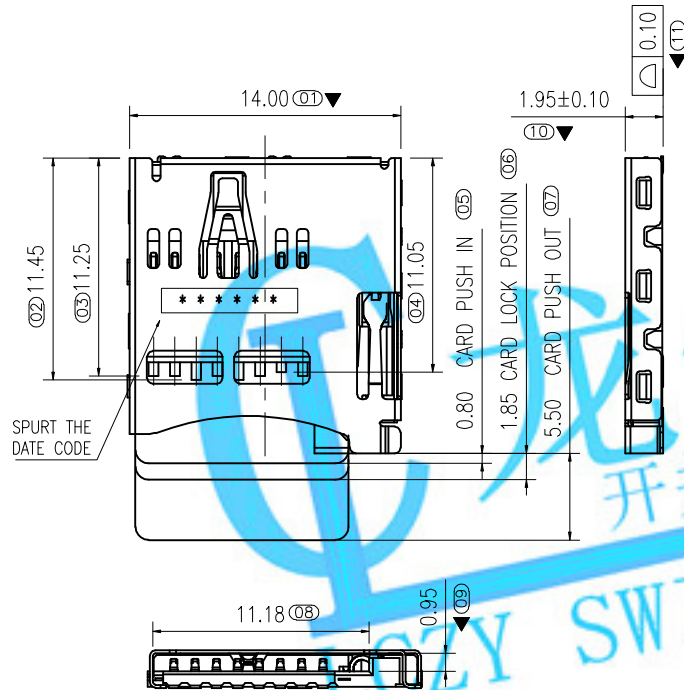

RECOMMEND PCB LAYOUT
GENERAL TOLERANCE ± 0.05

ES:

ERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy

Shell: STAINLESS

PLATING:

Contact: Plated 30u'' Ni Overall Contact Au 1U

Shell: Plated 30u'' Ni Overall

Plated 1u''Au Selective Contact Area

Electrical:

Current Rating : 1.0 A AC/DC max.

Voltage Rating : 30V AC/DC

Ambient Temperature Range : -20° C~+60° C

Storage Temperature Range : -40° C~+70° C

Ambient Humidity Range : 95% R. H. Max.

Contact Resistance: 100mΩ max.


Insulation Resistance: 1000MΩ min./500VDC

Mating Cycles: 3000Insertions

Temperature: 260° C $\pm 5^\circ$

公差 : $\pm 0.2\text{mm}$

龙创中业电子科技（东莞）有限公司



DATE 2014/3/27

TOLERANCES UNLESS	
X. ± 0.50	X° $\pm 3'$
.X ± 0.38	.X° $\pm 2'$
.XX ± 0.25	.XX° $\pm 1'$
.XXX ± 0.10	.XXX° $\pm 0.5'$

TITLE:
产品名称 TF CARD P-P常闭一体式 H1.85无柱
PART NUMBER:
零件编号 LCZY-102014462
DRAWING NUMBER:
图纸编号

UNIT 单位 mm	DESIGNED 设计 罗正富
SCALE 比例 1:1	CHECKED 核准 罗利斌
SHEET 页码 1/1	APPROVED 审批 张华宇