

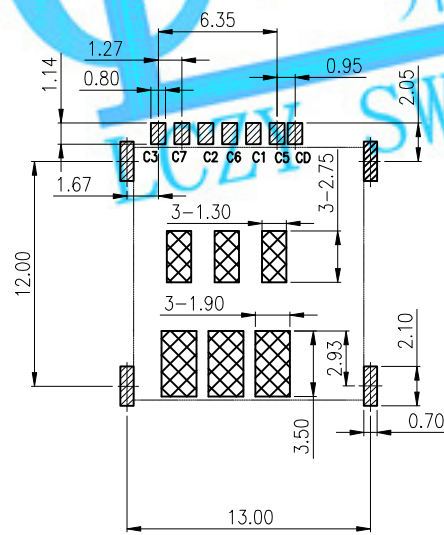
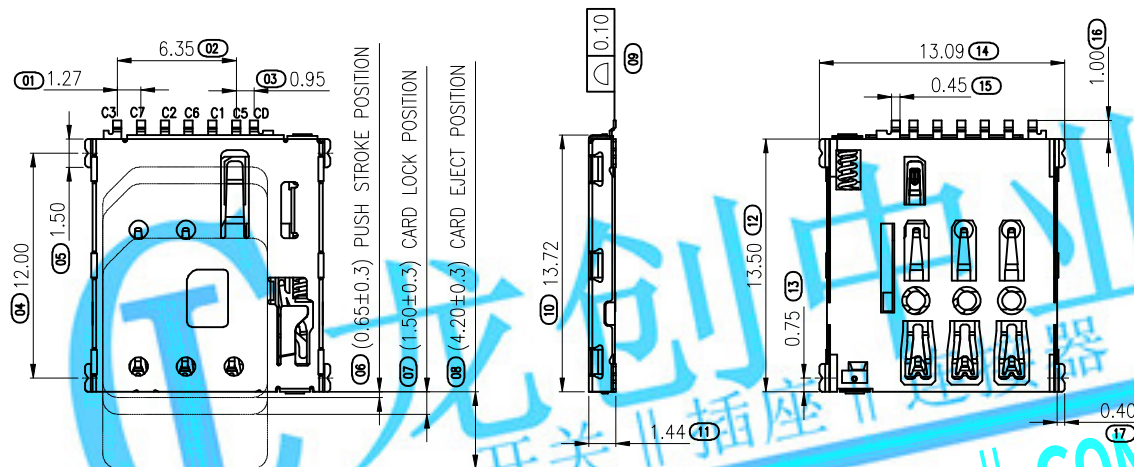
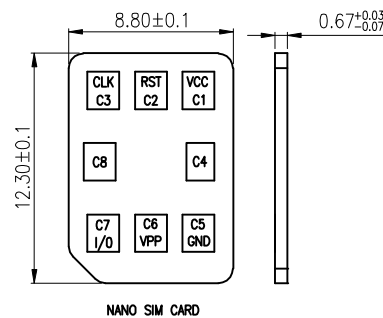




RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05



NANO SIM CARD

NOTES:

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
Shell: STAINLESS

PLATING:


Contact: Plated 30u'' Ni Overall Contact Au 1U
Shell: Plated 30u'' Ni Overall
Plated 1u''Au Selective Contact Area

Electrical:

Current Rating : 1.0 A AC/DC max.
Voltage Rating : 30V AC/DC
Ambient Temperature Range : -20° C~+60° C
Storage Temperature Range : -40° C~+70° C
Ambient Humidity Range : 95% R.H. Max.
Contact Resistance: 100mΩ max.
Insulation Resistance: 1000MΩ min./500VDC
Mating Cycles: 3000Insertions
Temperature: 260° C $\pm 5^\circ$

公差 : $\pm 0.2\text{mm}$

龙创中业电子科技(东莞)有限公司



DATE 2014/3/27

TOLERANCES UNLESS	
X. ± 0.50	X° $\pm 3^\circ$
.X ± 0.38	.X° $\pm 2^\circ$
.XX ± 0.25	.XX° $\pm 1^\circ$
.XXX ± 0.10	.XXX° $\pm 0.5^\circ$

TITLE: 产品名称 NANO SIM CARD PUSH 1.37H带CD PIN PT 防刮版无柱	UNIT 单位 mm	DESIGNED 设计 罗正富
PART NUMBER: 零件编号 LCZY-102314452	SCALE 比例 1:1	CHECKED 核准 罗利斌
DRAWING NUMBER: 图纸编号	SHEET 页码 1/1	APPROVED 审批 张华宇