


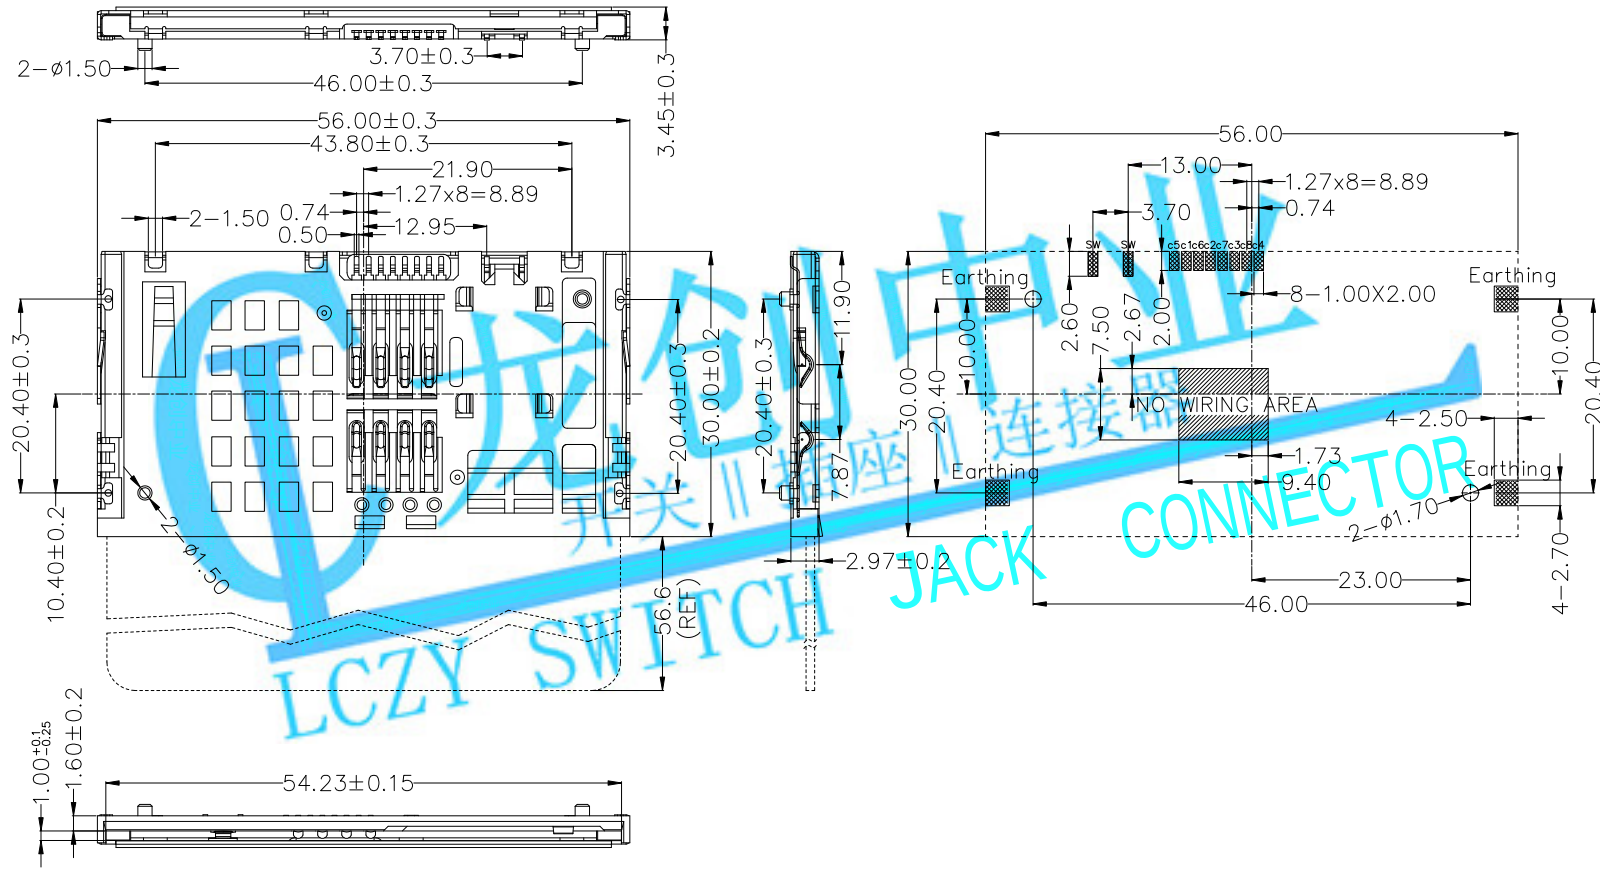

ES:

ERIAL:

Insulator: High Temperature Thermoplastic,UL 94V-0.

Contact: Copper Alloy

Shell: STAINLESS

PLATING:

Contact: Plated 30u'' Ni Overall Contact Au 1U

Shell: Plated 30u'' Ni Overall

Plated 1u''Au Selective Contact Area

Electrical:

Current Rating : 1.0 A AC/DC max.

Voltage Rating : 30V AC/DC

Ambient Temperature Range :-20° C~+60° C

Storage Temperature Range :-40° C~+70° C

Ambient Humidity Range :95% R.H. Max.

Contact Resistance:100mΩmax.


Insulation Resistance:10000Ωmin./500VDC

Mating Cycles: 3000Insertions

Temperature: 260° C ±5°

公差 : ±0.2mm

龙创中业电子科技(东莞)有限公司



DATE 2014/3/27

TOLERANCES UNLESS	
X. ± 0.50	X° ± 3'
.X ± 0.38	.X° ± 2'
.XX ± 0.25	.XX° ± 1'
.XXX ± 0.10	.XXX° ± 0.5'

TITLE: 产品名称	IC CARD ACCPTOR(H=3.0mm)
PART NUMBER: 零件编号	LCZY-402013312
DRAWING NUMBER: 图纸编号	

UNIT 单位 mm	DESIGNED 设计 罗正富
SCALE 比例 1:1	CHECKED 核准 罗利斌
SHEET 页码 1/1	APPROVED 审批 张华宇