



A B C D E F



REV	DESCRIPTION	DESIGN	DATE
AO			

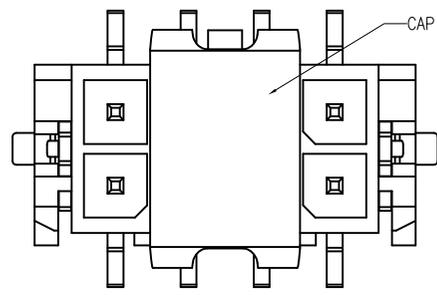

WITH COVER

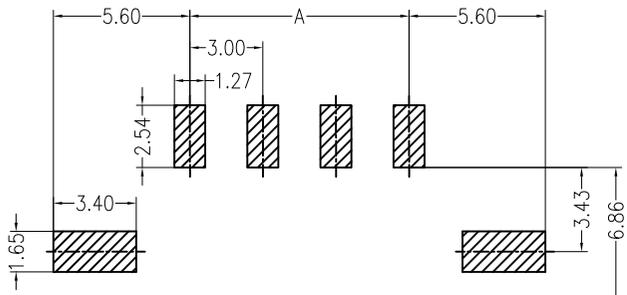

PCB LAYOUT(Tolerance:±0.05)

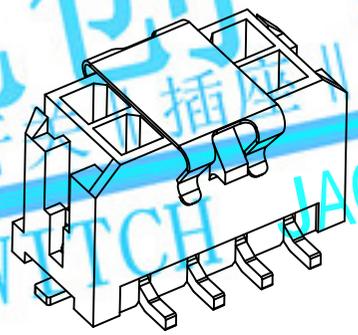
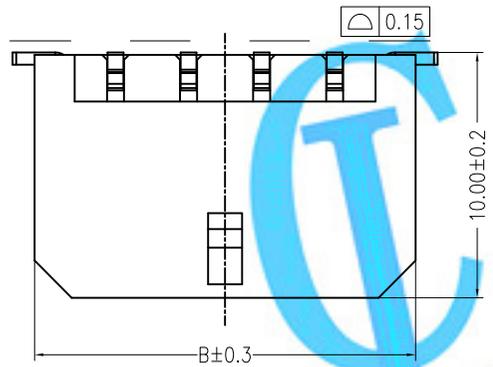


Specifications:

- Contact resistance: ≤10mΩ
- Insulation resistance: ≥1000MΩ
- Rated voltage: 250V AC DC
- Rated current: 5.0A AC DC
- Withstand Voltage: 1000V AC/minute
- Temperature Range: -25℃ ~ +85℃
- Housing: LCP UL94V-0, BLACK
- Contacts: Brass/MATTE Sn-plated
- Solder Tabs: Brass/MATTE Sn-plated
- CAP: Stainless steel

MX-3.0-2xXP-LT

PIN	DIM A	DIM B
2x1		6.65
2x2	3.00	9.65
2x3	6.00	12.65
2x4	9.00	15.65
2x5	12.00	18.65
2x6	15.00	21.65
2x7	18.00	24.65
2x8	21.00	27.65
2x9	24.00	30.65
2x10	27.00	33.65
2x11	30.00	36.65
2x12	33.00	39.65

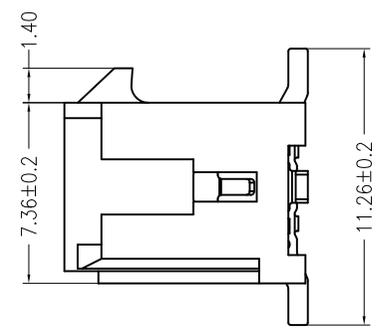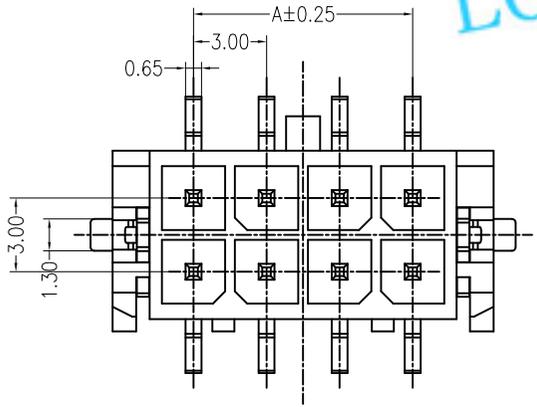

龙创中业电子科技(东莞)有限公司		TITLE: 3.0 Pitch Wafer 180° SMT	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ±0.50	X. ±5°	APPD:	DWG NO.: MX-3.0-2xXP-LT
X.X ±0.30	X.X ±2°	CHKD:	
X.XX ±0.20	X.XX ±1°	DR:	SCALE: 1 : 1
UNITS: mm		SHEET: 1 / 1	

A B C D E F