






REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0				



With Cap View

主要技术参数 Main Specifications

线数 (Poles): 04 to 24
额定电阻 (Contact resistance): $\leq 10\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 5A AC DC
耐电压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

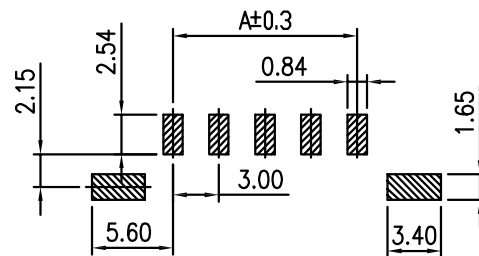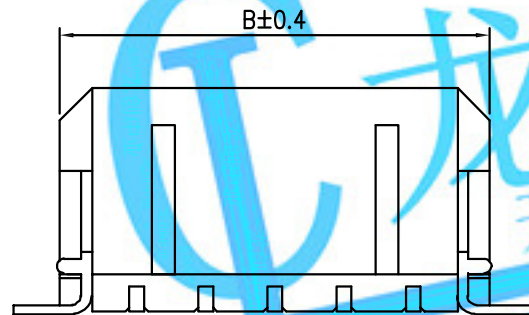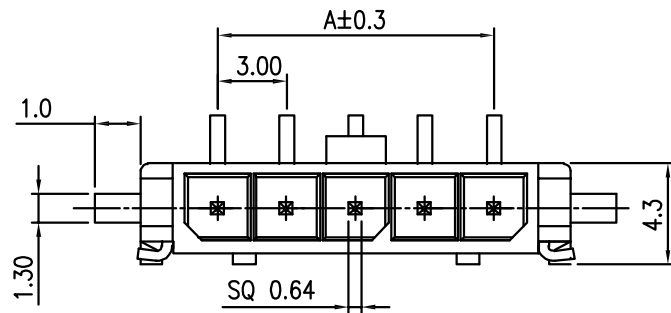

PCB LAYOUT

MX-3.0-XP-LT

PIN NO.	Dimension mm	
	A	B
02P	3.0	9.7
03P	6.0	12.7
04P	9.0	15.7
05P	12.0	18.7
06P	15.0	21.7
07P	18.0	24.7
08P	21.0	27.7
09P	24.0	30.7
10P	27.0	33.7
11P	30.0	36.7
12P	33.0	39.7

C	SOLDER TAB		2 PCS	Brass	Sn-plated
B	CONTACT		2~12PCS	Brass	Sn-plated
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BLACK
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
龙创中业电子科技(东莞)有限公司					TITLE: - 3.0mmPITCH 180°WAFER SMT TYPE
X.±0.5	X.±5°	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2°		DWG NO.: MX-3.0-XP-LT		
.XX±0.25	.XX±1°		SCALE		
--	--	CHKD:	SHEET		
⊕	⚡	UNITS: mm	DR:		
			1 : 1		
			1 / 1		