

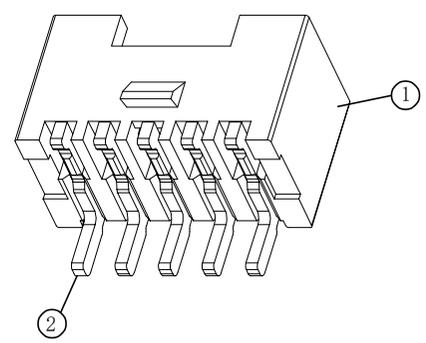
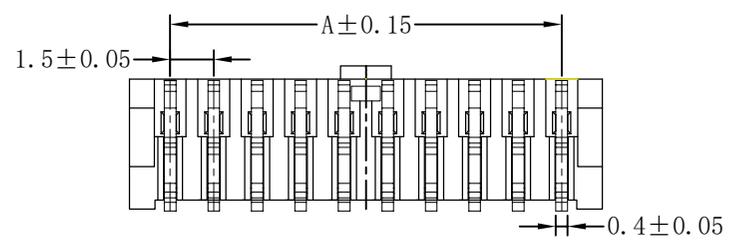
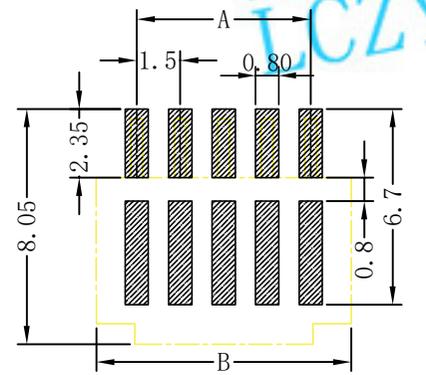



REV.	DESCRIPTION	DATE
A/0	新版发行	2016.11.28

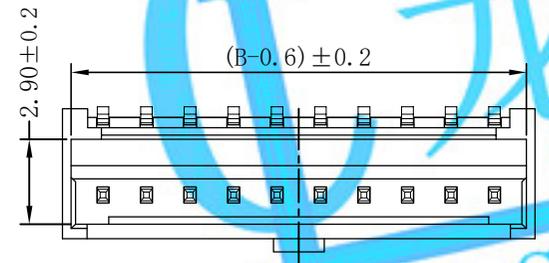

- 技术要求:
- 1、塑件材料: PA9T (UL-94V-0)
 - 2、接触件: 黄铜镀锡
 - 3、接触电阻: $\leq 10m\Omega$
 - 4、绝缘电阻: $\geq 1000M\Omega$
 - 5、额定电压: 250V AC DC
 - 6、额定电流: 2.0A AC DC
 - 7、耐压: 能承受1000V AC/Minute
 - 8、工作温度: $-25^{\circ} \sim +105^{\circ}$
 - 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $260^{\pm 5^{\circ}}$, 时间 2.5 ± 0.5 秒
 - 10、铅和镉等六大有害物质含量要符合环保要求

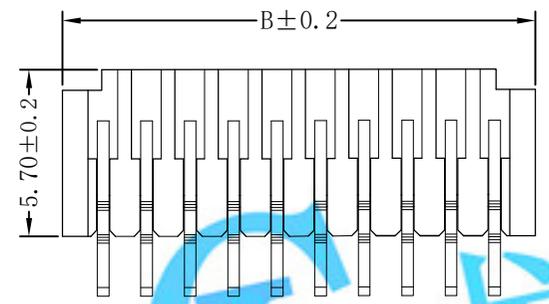

MX-1.5-XA-WT-DK

型号 Type	尺寸 Dimensions (mm)	
卧式 AWR (90°)	A	B
MX1.5-2A	1.50	4.30
MX1.5-3A	3.00	5.80
MX1.5-4A	4.50	7.30
MX1.5-5A	6.00	8.80
MX1.5-6A	7.50	10.30
MX1.5-7A	9.00	11.80
MX1.5-8A	10.50	13.30
MX1.5-9A	12.00	14.80
MX1.5-10A	13.50	16.30
MX1.5-11A	15.00	17.80
MX1.5-12A	16.50	19.30
MX1.5-13A	18.00	20.80

2	端子 Contact	黄铜 Brass	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡60u". MIN.
1	底座 Wafer	PA9T(UL94V-0)	1	本色
序号	名称	材料	数量	附注

GENERAL TOLERANCES			DRAWN BY		龙创中业电子科技(东莞)有限公司		
0.X	± 0.25	X. $^{\circ}$	$\pm 3^{\circ}$	CHK. BY			
0.XX	± 0.12			APRV. BY			
0.XXX	± 0.05	X.X $^{\circ}$	$\pm 0.5^{\circ}$	DRAWING NO.	1 OF 1	PART NO. MX-1.5-XA-WT-DK	
UNIT	SIZE	SCALE		006-0082-001	TITLE		
MM	A4	1:1		1.5FPC CONN. ZIF SMT FRONTFLIP H=5 DOUBLE LOWER CONTACT			

借用登记
旧底图总号
底图总号
签字
日期