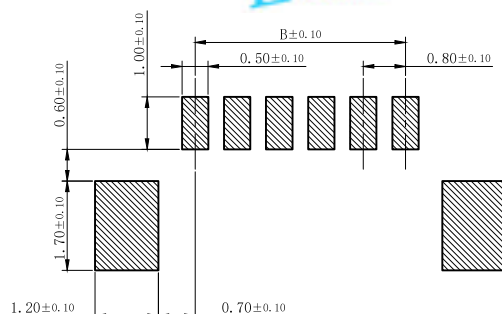

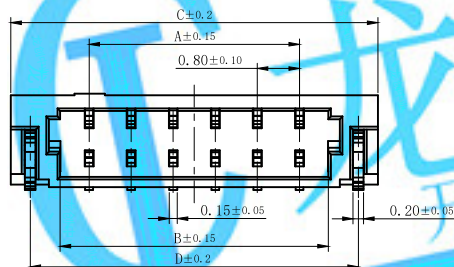



0.8刺破卧贴

REV.	DESCRIPTION	DATE
A/0	新版发行	2016.11.28

技术要求:

- 1、塑件材料: LCP (UL-94V-0)
- 2、接触件: 黄铜镀锡
- 3、接触电阻: $\leq 20\text{m}\Omega$
- 4、绝缘电阻: $\geq 100\text{M}\Omega$
- 5、额定电压: 125V AC DC
- 6、额定电流: 1.0A AC DC
- 7、耐压: 能承受500V AC/Minute
- 8、工作温度: $-25^{\circ}\sim+85^{\circ}$
- 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 260^{+5}_{-0}a , 时间 2.5 ± 0.5 秒
- 10、铅和镉等六大有害物质含量要符合环保要求

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

PH-0.8-XP-WT

CKT	Dim A	Dim B	Dim C	Dim D
2	0.80	1.90	3.78	3.04
3	1.60	2.70	4.58	3.84
4	2.40	3.50	5.38	4.64
5	3.20	4.30	6.18	5.44
6	4.00	5.10	6.98	6.24
7	4.80	5.90	7.78	7.04
8	5.60	6.70	8.58	7.84
9	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

3	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(金): 整个表面镀底镍30u"MIN, 再镀锡0.8u".
2	端子 Contact	磷青铜 Phosphor Bronze	n*1	电镀(金): 整个表面镀底镍30u"MIN, 再镀锡0.8u".
1	基座 Wafer	LCP(UL94V-0)	1	本色
序号	名称	材料	数量	附注

GENERAL TOLERANCES			DRAWN BY	龙创中业电子科技(东莞)有限公司		
0.X	±0.25	X.° ±3°	CHK. BY			
0.XX	±0.12					
0.XXX	±0.05	X.X° ±0.5°	APRV. BY			
UNIT	SIZE	SCALE		DRAWING NO.	1 OF 1	PROD. NAME 0.8刺破卧贴
MM	A4	1:1		PART NO. PH-0.8-XP-WT		
				TITLE		