

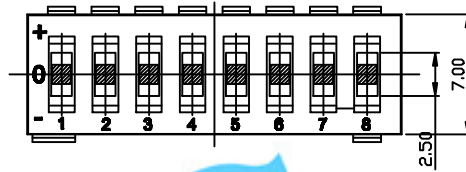





版本	日期	发行原因	签名
A/0			

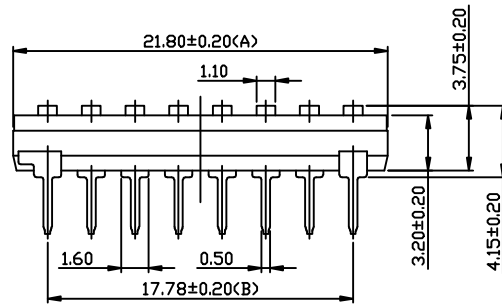

POS.	DIMENSIONS	
	A	B
4P	11.64	7.62
5P	14.18	10.16
8P	21.80	17.78
9P	24.34	20.32
10P	26.88	22.86

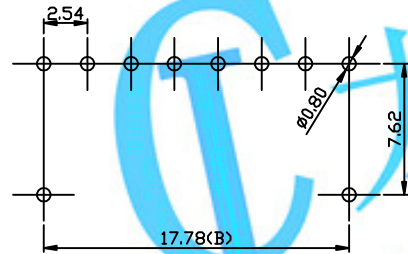

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



NOTES:

1.Specification:

- 1>.Operating force:1000g/f Max
- 2>.Mechanical Life:3000cycles minimum
- 3>.Electrical Life:2000cycles minimum

Contact Rating:

- 1>.Switching:25mA,24VDC
- 2>.Non Switching 100mA,50VDC

Contact Resistance:

- 1>.Initial: 50mOhm Max.
- 2>.Afer Life Test:100mOhm Max.

2. PLATING:

GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DSDT XX L H G E I

[包装方式: T=管装 R=Reel]

[电镀层: E=接触部3u" G=接触部3u" /焊接部1~2u"]

[G=波全金 S=内金外锡]

[脚型: S脚 / J脚 / H脚 / A脚 / Z脚]

[T=低推贴胶 S=低推不贴胶 L=长推]

[产品P数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

单位	材质	工艺	数量
NORMAL DIMENSION TOLERANCE			
X.00=±0.05	X.00° ±0.25°		
X.0=±0.1	X.0° ±0.5°		
X=±0.25	X ±1°		

龙创中业电子科技（东莞）有限公司

核准	物料编号	模具编号
审核		
设计	产品型号	产品名称
绘图	He 2016/03/15	DSDTxxLHGET 三态成品图
第三角法	页码 001	比例 1:1 H脚