

Notes:

1. Specctions:

- 1). Operating force:1000gf Max
- 2). operating temperature:-30° to+85°
- 3). storage temperature:-40° to+85°
- 4). Mechanical life:3000cycles minimum

2. PLATING:

GOLD FLASH 1u" (min.) SOLDER TAIL
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDER PATING GOVER ALL .

3 Part NUMBER DESCRIPTION

DSIC XX L S G E T

(包装方式: T=管装 R=Reel)




(电镀层: E=接触部3u", G=接触部3u"/焊接部1-2u")

(G=镀全金 S=内金外铜)

(脚型: S脚/J脚/H脚/A脚/Z脚)


(T=低推贴胶 S=低推不贴胶 L=长推)

(产品P数: 02=2P, 04=4P, 06=6P, 08=8P)

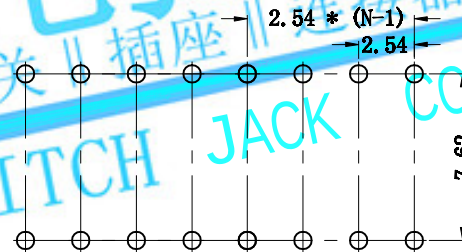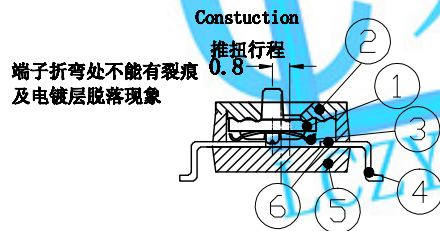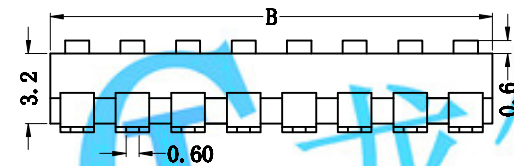

RECOMMENDED P. C. B. LAYOUT (TOP VIEW)

Schematic



DIMENTIONS			DIMENTIONS		
POS.	A	B	POS.	A	B
1P	/	2.54	2P	2.54	5.08
3P	5.08	7.62	4P	7.62	10.16
5P	10.16	12.70	6P	12.70	15.24
7P	15.24	17.78	8P	17.78	20.32
9P	20.32	22.86	10P	22.86	25.40
			12P	27.94	30.48

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Termincal contact	Brass	3u"Gold

单位	材质	硬度	数量	龙创中业电子科技（东莞）有限公司							
mm				核准			物料编号		模具编号		
NORMAL DIMENSION TOLERANCE				审核							
L 00±0.05		0.00° ± 0.25°		设计			产品型号		产品名称		
L 0±0.1		0.0° ± 0.5°		绘图	He 2015/12/07		DSICXLSGET		2.54成品图		
L ±0.25		0° ± 1°		第三角法			页码	001	比例	1/1	S脚

版本	日期	发行原因	绘图	核准
A				