
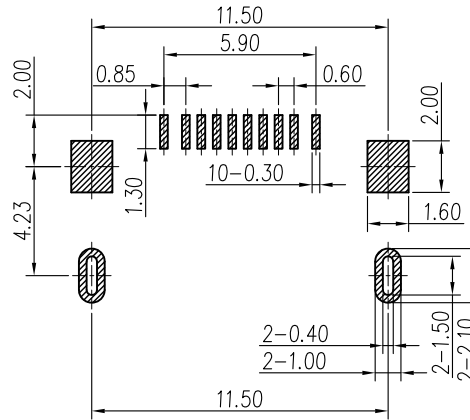
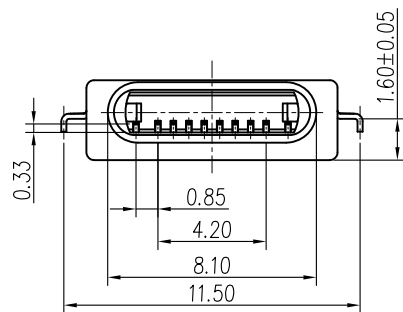
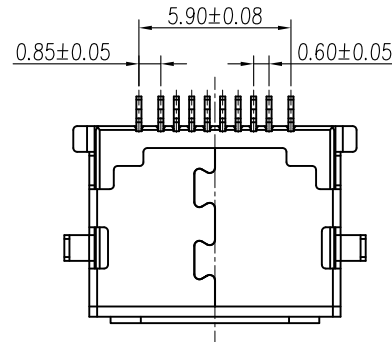
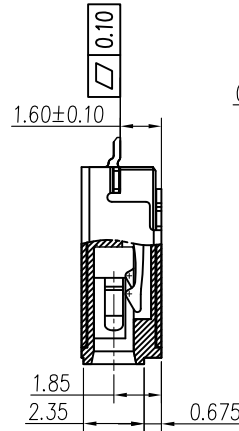
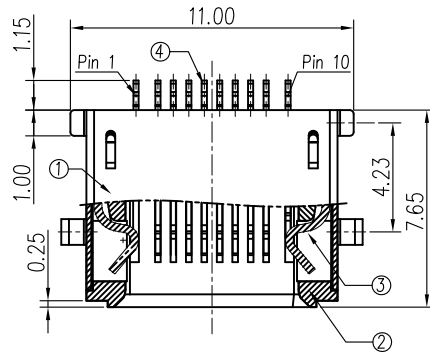


RoHs

VER	MARK	PR. BY	ECR/ECN	DESCRIPTION	DATE
B				新增料号	04/29/19

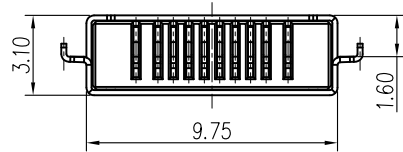

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

PIN NO.	NAME	PIN NO.	NAME
1	DETECT1	7	DN2
2	GND	8	DP2
3	DP1	9	ACC2
4	DN1	10	DETECT2
5	ACC1	Shell	GND
6	PWR IN		

规格:

1. 电气特性:

接触电流额定值:1.5安培最大。

额定电压:30 v Max。

介质耐压:交流500V r.m.s。

绝缘电阻:100 MΩ最低。

接触电阻:50 mΩ最大值。

2. 环境:

工作温度:-25° C ~ + 85° C。

3所示。机械特点:

插拔力:15 nf Max。

退出力:3 nf分钟。

耐久性Cycles:5000 Cycles。

NO.	PN.	DESCRIPTION
1	5010-FGB003	FG 10PIN 1.6母座 黑色
2	5010-FGW004	FG 10PIN 1.6母座 白色
4	CONTACT	Copper Alloy;AuNi; T=0.20mm;
3	LATCH	Stainless Steel;SUS301,T=0.30mm;
2	HOUSING	LCP Thermoplastic,UL94V-0;
1	SHELL	Stainless Steel;SUS201,T=0.20mm;
NO.	NAME	DESCRIPTION

ASSEMBLY		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY:	TITLE:	龙创中业	
SIZE A4	UNITS MM[INCH]	X±0.50	X*±5.0°	Song	FG 10PIN 沉板1.6母座		
		.X±0.35	.X*±3.0°	CHECKED BY: Talen.Liu	PART NO.:IPNF-101T See the List -4BVS11		
SCALE 1:1	REV. 1	.XX±0.25	.XX*±2.5°	DESIGN BY: Deng	DWG NO.: 5010-FGXXXX	SHEET 1/1	
		.XXX±0.15	.XXX*±2.0°				