

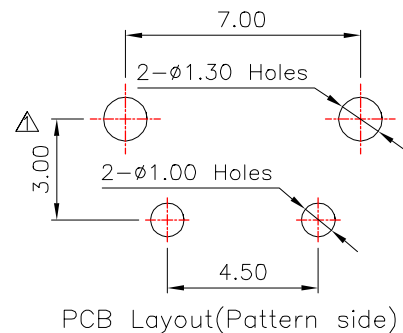
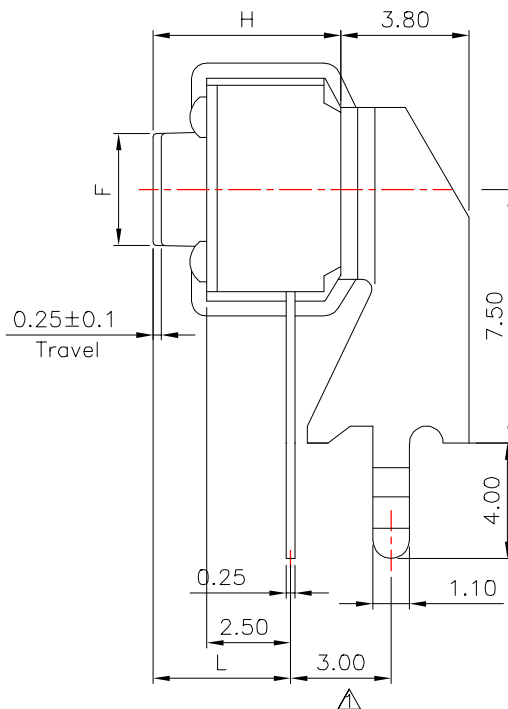


RoHS

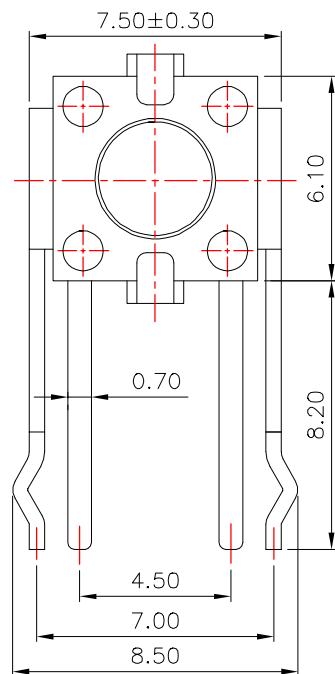

Height(高度) : NO 1

NO.1			
PART NO	H	L	F
A	4.3	2.80	ø3.40
C	5	3.50	ø3.40
D	5.5	4.00	ø3.40
E	6	4.50	ø3.40
G	7	5.50	ø3.20
I	8	6.50	ø3.20
K	9	7.50	ø3.20
L	9.5	8.00	ø3.20



Material:

Button 按钮	PPA/LCP
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA			
Contact impedance(接触阻抗):	≤ 100mΩ MAX			
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN			
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s			
OPERATING LIFE(电气寿命):	100,000 cycles			
Usage temperature(使用温度):	-25 to 85			
Operating humidity(使用湿度):	≤ 85% RH			
Trip(行程):	0.25 ± 0.1mm			
Operating force(操作力):	1	90 ± 30gf	2	130 ± 30gf
	3	180 ± 50gf	4	250 ± 50gf
	5	350 ± 50gf	6	

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K2-1102BG		CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	APPROVAL		DATE	K2-09-2019
	mm		±0.2 ±0.3 ±0.5 ±3°	SCALE	2:1	PAGE	1 OF 1

K2-1102BG-□-□