



RoHS

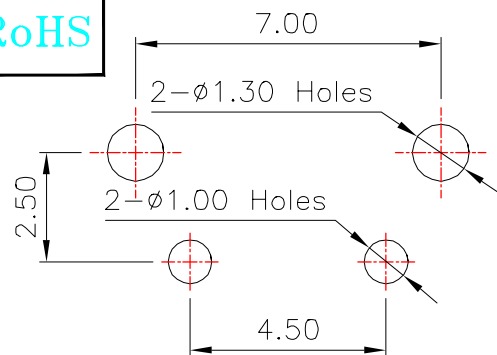

PCB Layout(Pattern side)



Circuit Diagram

Height(高度) : NO 1

NO.1			
PART NO	H	L	F
A	4.3	3.15	ø3.40
C	5	3.85	ø3.40
E	6	4.85	ø3.40
G	7	5.85	ø3.20
I	8	6.85	ø3.00
K	9	7.85	ø3.00
L	9.5	8.35	ø3.00

Material:

Button 按钮	PPA/LCP
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA	
Contact impedance(接触阻抗):	≤100mΩ MAX	
Insulation impedance(绝缘阻抗):	≥100MΩ MIN	
Welding resistance temperature(耐焊温度):	250±5 ° 5s	
OPERATING LIFE (电气寿命):	100,000 cycles	
Usage temperature (使用温度):	-25 °C to 85 °C	
Operating humidity (使用湿度):	≤85% RH	
Trip(行程):	0.25±0.1mm	
Operating force(操作力):	1 90±30gf	2 130±30gf
	3 180±50gf	4 250±50gf
	5 350±50gf	6

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K2-1102BQ		CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	ANGLE	APPROVAL	DATE	K2-09-2019
			ABOVE 5 ~30				
	mm		ABOVE 30	0°±3°	SCALE	PAGE	1 OF 1
			ANGLE				

K2-1102BQ-□-□