

RoHS

Height(高度):NO.1

9.0	J	15.0	T
8.5	I	14.5	S
8.0	H	13.0	R
7.5	G	12.5	Q
7.0	F	12.0	P
6.5	E	11.5	O
6.0	D	11.0	N
5.5	C	10.5	M
5.0	B	10.0	L
4.3	A	9.5	K
高度H(mm)	X=	高度H(mm)	X=

Material:

Button 按钮	PPA/LCP
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA			
Contact impedance(接触阻抗):	≤ 100mΩ MAX			
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN			
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s			
OPERATING LIFE(电气寿命):	100,000 cycles			
Usage temperature(使用温度):	-25 to 85			
Operating humidity(使用湿度):	≤ 85% RH			
Trip(行程):	0.25 ± 0.1mm			
Operating force(操作力):	1	90 ± 30gf	2	130 ± 30gf
	3	180 ± 50gf	4	250 ± 50gf
	5	350 ± 50gf	6	

NO.2


public errand(公差): ±0.2mm unit(单位): mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K2-1102HW			CHECK	Z.LIU	REV.	A1
	UNIT:	TOLERANCE	UP TO 5	APPROVAL	DATE	K2-09-2019	
	mm	OTHERWISE	ABOVE 5 ~ 30				
			ABOVE 30	SCALE	2:1	PAGE	1 OF 1
			ANGLE				
			0°±3°				

K2-1102HW-□-□

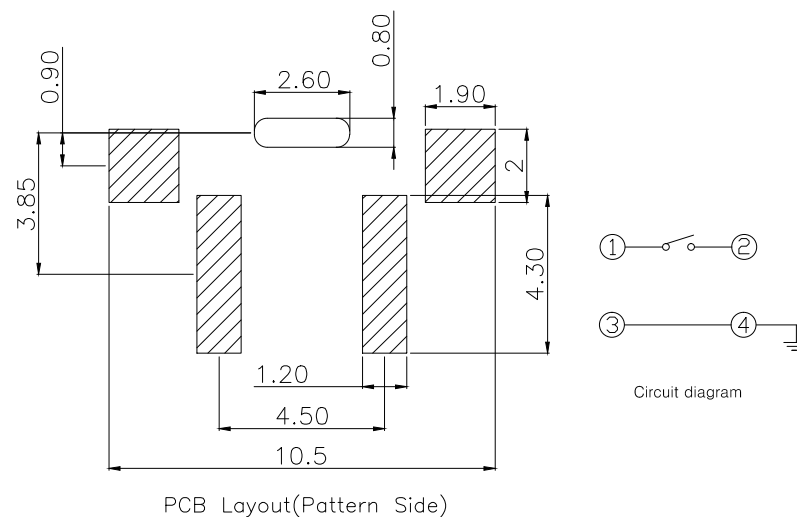

PCB Layout(Pattern Side)

