

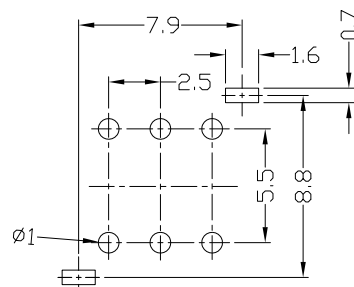


RoHS

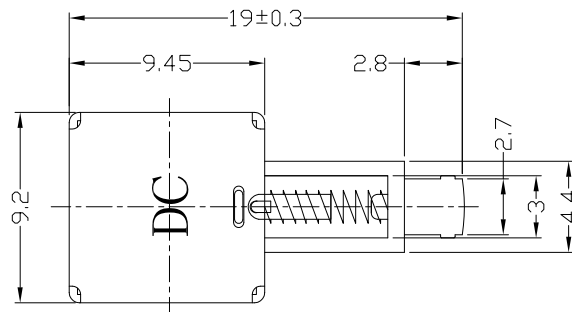

P.C.B LAYOUT



CIRCUIT DIAGRAM

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	尼龙/POM
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 基座	电木
Pin 引脚	铜 (镀银)
housing外壳	铁

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	235波峰焊		
OPERATING LIFE(电气寿命):	10,000 cycles		
Usage temperature(使用温度):	-25 to 80		
CIRCUIT	2P2T	NON-SHORTING	
Trip(行程):	3.5 ± 0.3mm		
Operating force(操作力):	1	2	
	3		250 ± 100g
	5	6	
	NO.2		

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K8-22E02				CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	K8-09-2019
	mm		ABOVE 5 ~30	±0.3					
			ABOVE 30	±0.5					
			ANGLE	±3°					
					SCALE	2:1	PAGE	1 OF 1	

K8-22E02-□-□

B

A