






RoHS

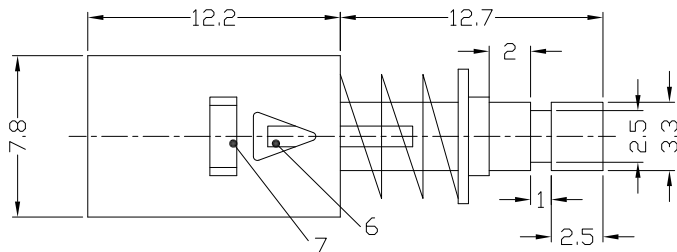

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

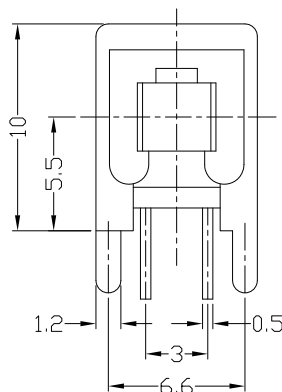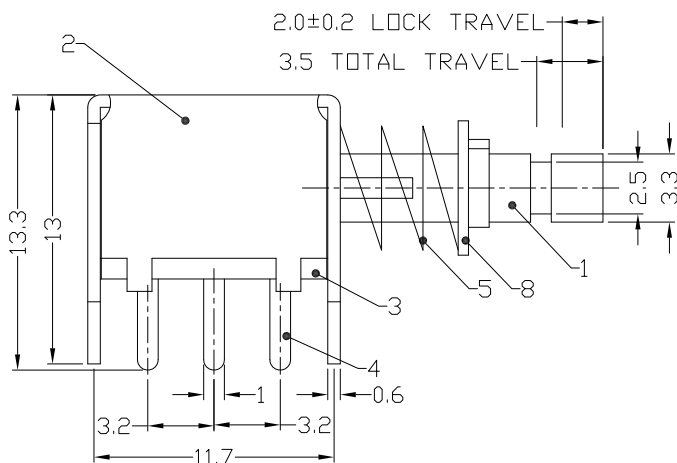

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	尼龙/POM
crochet hook钩针	不锈钢(复银)
spring 弹簧	黄铜(镀银)
Base 基座	电木
Pin 引脚	铜(镀银)
housing外壳	铁

Main technical specifications:

Rated load(额定负荷):		DC 50V 0.3A	
Contact impedance(接触阻抗):		≤ 100mΩ MAX	
Insulation impedance(绝缘阻抗):		≥ 100MΩ MIN	
Welding resistance temperature(耐焊温度):		235波峰焊	
OPERATING LIFE(电气寿命):		10,000 cycles	
Usage temperature(使用温度):		-25 to 80	
CIRCUIT		2P2T	NON-SHORTING
Trip(行程):		3.5 ± 0.3mm	
Operating force(操作力):	1	2	250 ± 100g
	3	4	
	5	6	

NO.2

public errand(公差): ±0.2mm unit(单位): mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-22F02			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	APPROVAL	DATE	K8-09-2019	1 OF 1
	mm	OTHERWISE	ABOVE 5 ~ 30				
			ABOVE 30	SCALE	2:1	PAGE	
			ANGLE				
			±0.2 ±0.3 ±0.5 ±3				
			0°±3°				

K8-22F02-□-□