

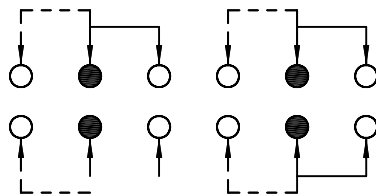
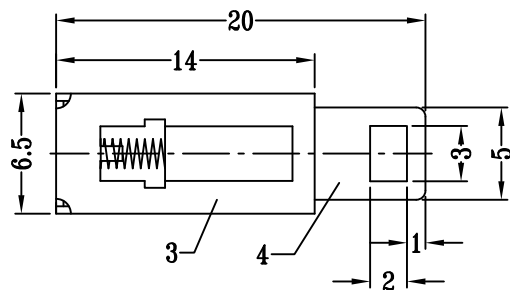
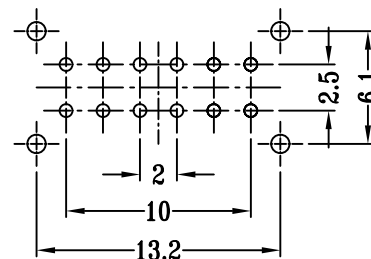


RoHS

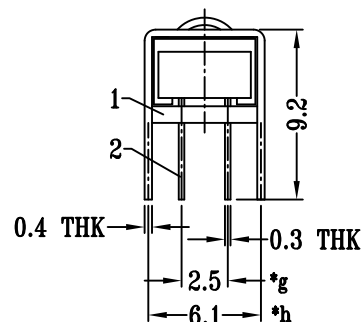

SCHEMATIC (SHORTING/NON-SHORTING)

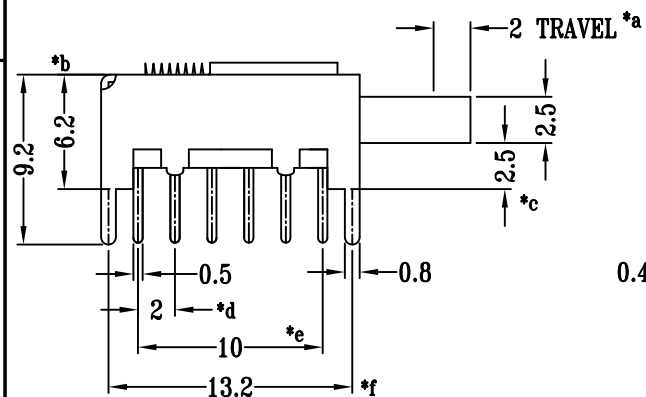

P.C.B LAYOUT

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	尼龙
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 基座	电木
Pin 引脚	铜 (镀银)
housing外壳	铁

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A		
Contact impedance(接触阻抗):	≤ 100mΩMAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩMIN		
Welding resistance temperature(耐焊温度):	235波峰焊		
OPERATING LIFE(电气寿命):	10,000 cycles		
Usage temperature(使用温度):	-25 to 80		
CIRCUIT	4P2T	NON-SHORTING	
Trip(行程):	3.5 ± 0.3mm		
Operating force(操作力):	1	2	
	3	4	350 ± 100g
	5	6	
	NO.2		

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-42D02			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	ANGLE	APPROVAL		DATE	K8-09-2019
	mm	OTHERWISE	UP TO 5 ±0.2 ABOVE 5 ~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°	SCALE	2:1	PAGE	1 OF 1

K8-42D02 - □ - □