

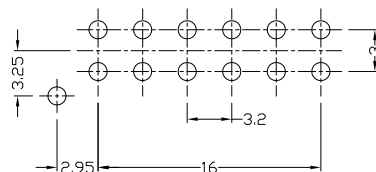
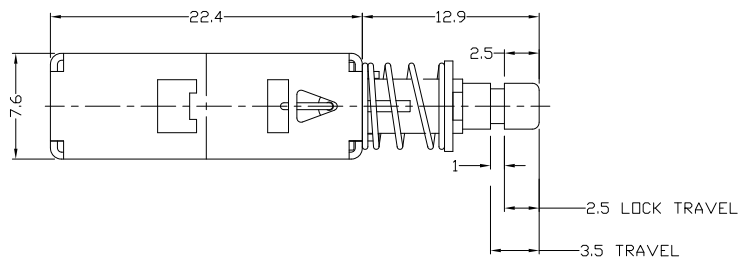
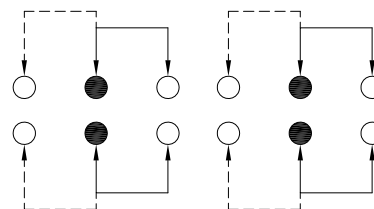


RoHS



P.C.B LAYOUT
BOTTOM VIEW

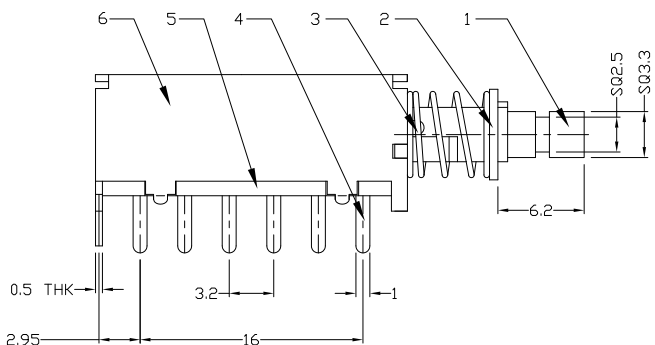

CIRCUIT DIAGRAM

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	尼龙/POM
crochet hook钩针	不锈钢(复银)
spring 弹簧	黄铜(镀银)
Base 底座	电木
Pin 引脚	铜(镀银)
housing外壳	铁

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	235波峰焊		
OPERATING LIFE(电气寿命):	10,000 cycles		
Usage temperature(使用温度):	-25 to 80		
CIRCUIT	4P2T	NON-SHORTING	
Trip(行程):	3.5±0.3mm		
Operating force(操作力):	1	2	350 ± 100g
	3	4	
	5	6	

NO.2

public errand(公差): ±0.2mm unit(单位): mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K8-42F42		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K8-09-2019	PAGE	1 OF 1	
			ABOVE 5 ~ 30	±0.3							
	mm		ABOVE 30	±0.5	0° ± 3°	SCALE	2:1				
			ANGLE	±3°							

K8-42F42-□-□