
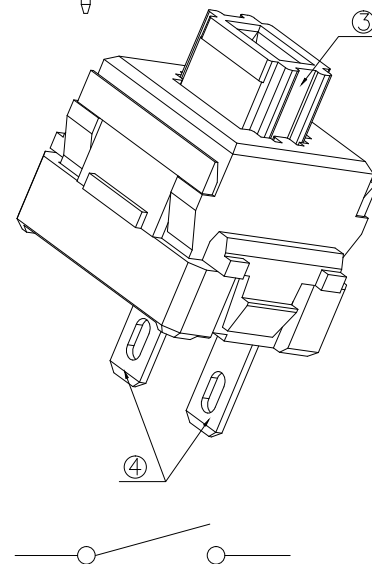
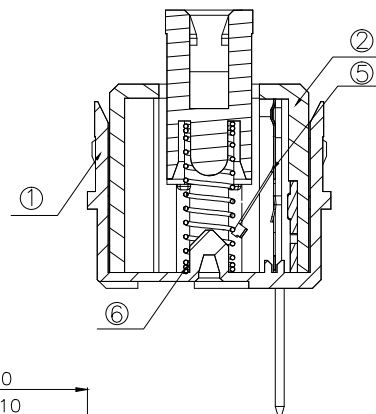
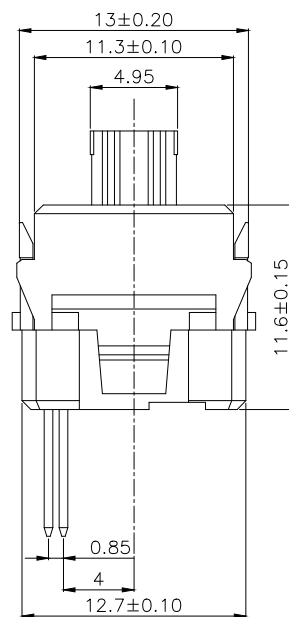
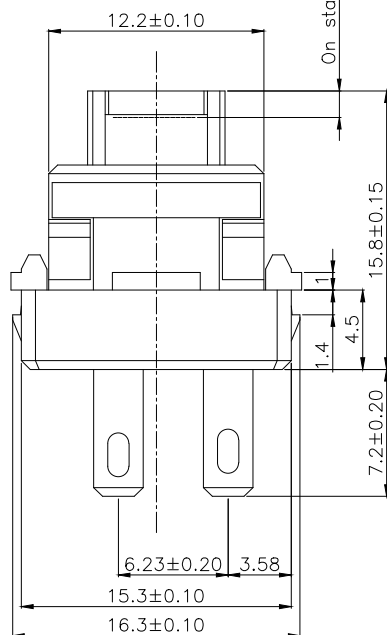


RoHS

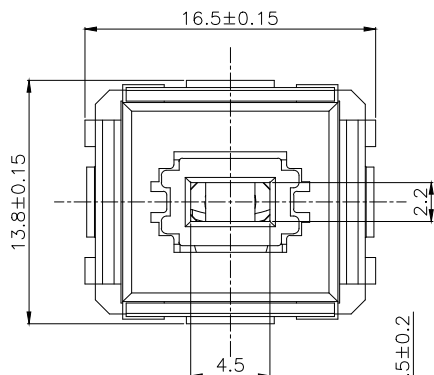

Circuit Diagram

function(功能) :

NO.1	
PART NO	
L	
N	无锁

Material:

Button 按钮	POM
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 底座	POM
Pin 引脚	铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 0.1A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 1Ω MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s		
OPERATING LIFE (电气寿命):	300,000 cycles		
Usage temperature (使用温度):	-25 to 80		
Operating humidity (使用湿度):	≤ 85% RH		
Trip(行程):	2.0 ± 0.2mm		
Operating force(操作力):	1	2	110 ± 50gf
	3	4	
	5	6	

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-1613D			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	ANGLE	APPROVAL	DATE	K8-09-2019
	mm	OTHERWISE	ABOVE 5 ~30				
			±0.2	0°±3'	SCALE	PAGE	1 OF 1
			±0.3				
			±0.5				
			±3'				

K8-1613D-□-□