

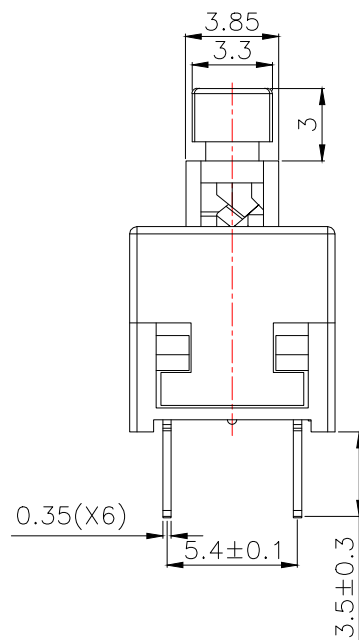

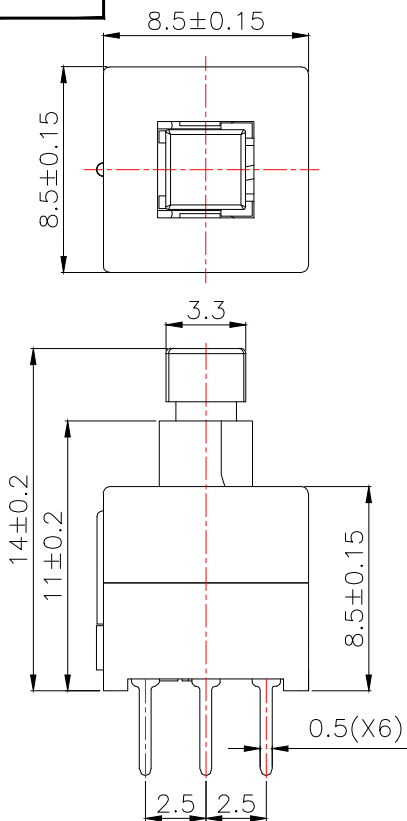
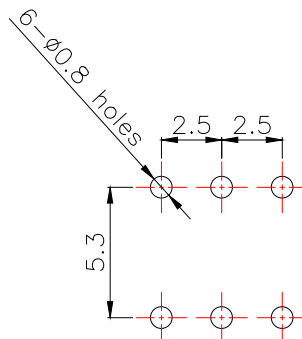



RoHS

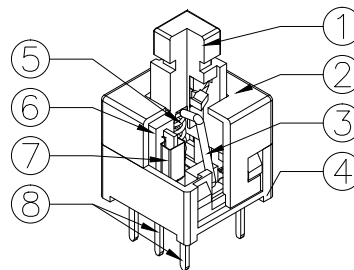

Circuit Diagram



PCB Layout(Pattern Side)

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	POM
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 基座	PA66
Pin 引脚	铜 (镀银)
Upper cover上盖	POM

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.1A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s		
OPERATING LIFE (电气寿命):	10,000 cycles		
Usage temperature (使用温度):	-25 to 80		
Operating humidity (使用湿度):	≤ 85% RH		
Trip(行程):	2.4 ± 0.3mm		
Operating force(操作力):	1	2	250 ± 100g
	3	4	
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

public errand (公差) : ±0.2mm unit (单位) : mm

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K8-2213A		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3	ANGLE 0° ± 3°	APPROVAL		DATE		K8-09-2019	
						SCALE		PAGE		1 OF 1	

K8-2213A-□-□