

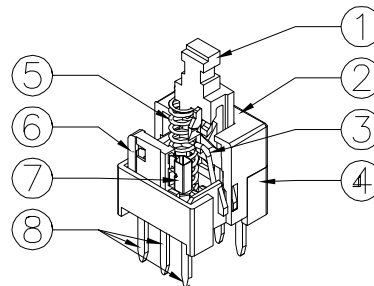


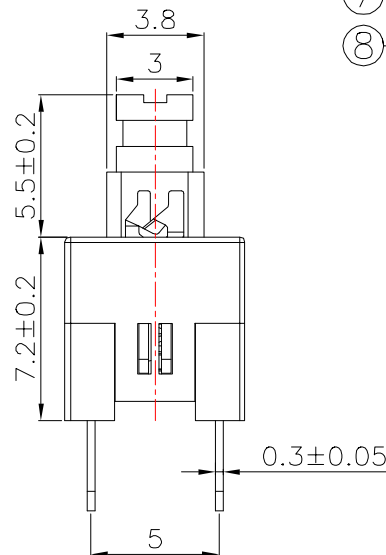

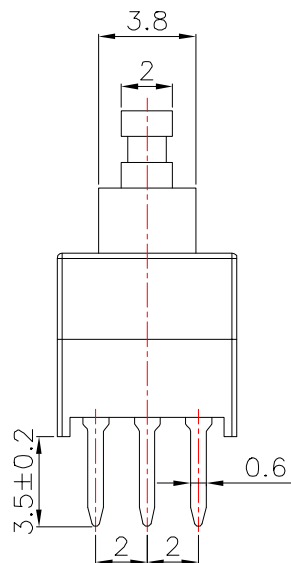


RoHS



function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	POM
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 基座	PA66
Pin 引脚	铜 (镀银)
Upper cover上盖	PA66

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.1A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s		
OPERATING LIFE (电气寿命):	10,000 cycles		
Usage temperature (使用温度):	-25 to 80		
Operating humidity (使用湿度):	≤ 85% RH		
Trip(行程):	2.4 ± 0.2mm		
Operating force(操作力):	1	2	250 ± 50gf
	3	4	
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K8-7071D		CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE	K8-09-2019
	mm	OTHERWISE	ABOVE 5 ~ 30	±0.3			
			ABOVE 30	±0.5	SCALE	PAGE	1 OF 1
			ANGLE	±3°			

K8-7071D-□-□