
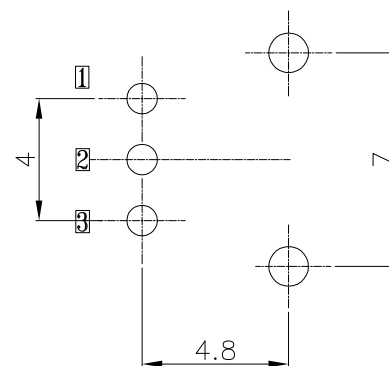



RoHS

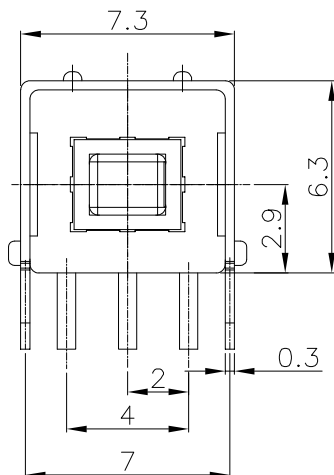

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	PPA
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 基座	PPA
Pin 引脚	铜 (镀银)
Upper cover上盖	PPA

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.1A
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	10,000 cycles
Usage temperature (使用温度):	-25 to 80
Operating humidity (使用湿度):	≤ 85% RH
Trip(行程):	2.0 ± 0.2mm
Operating force(操作力):	1 2 3 4 5 6 250 ± 50gf

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-5854P			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE
	mm	OTHERWISE	ABOVE 5 ~ 30	±0.3		SCALE	K8-09-2019
			ABOVE 30	±0.5	0° ± 3°		PAGE
			ANGLE	±3°			1 OF 1

K8-5854P - □ - □