

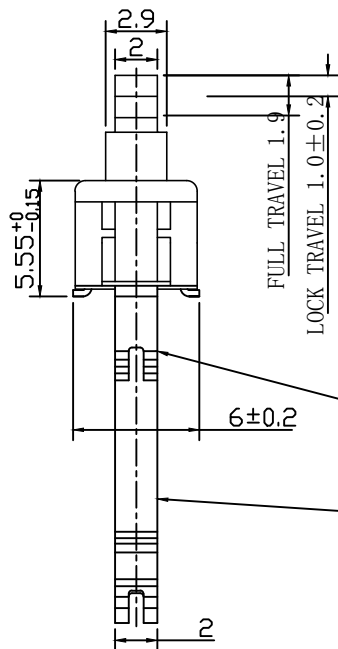
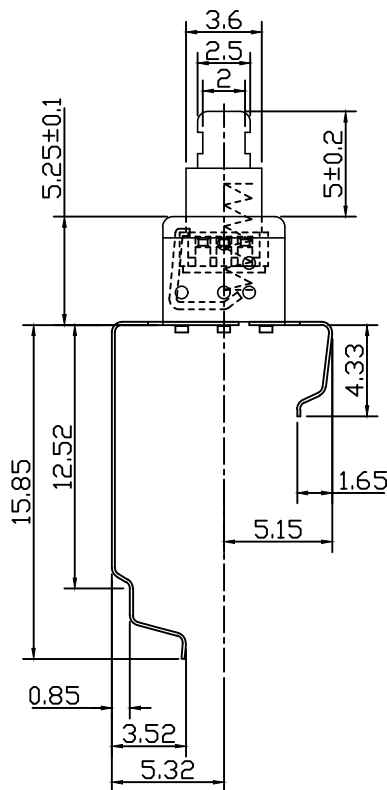






RoHS



function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material :

9	CONTACTPIECE-2	SUS	1	NATURAL
8	CONTACTPIECE-1	SUS	1	NATURAL
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.5A
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE(电气寿命):	20,000 cycles
Usage temperature(使用温度):	-25 to 80
Operating humidity(使用湿度):	≤ 85% RH
Trip(行程):	1.5 ± 0.2mm
Operating force(操作力):	1 2 3 4 5 6 200 ± 50gf
NO.2	

public errand (公差) : ± 0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K8-5851DDCP		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K8-09-2019	PAGE	1 OF 1	
			ABOVE 5 ~ 30	±0.3							
	mm		ABOVE 30	±0.5	0° ± 3°	SCALE	2:1				
			ANGLE	±3°							

K8-5851DDCP - □ - □