


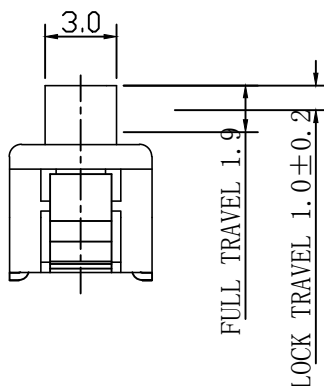
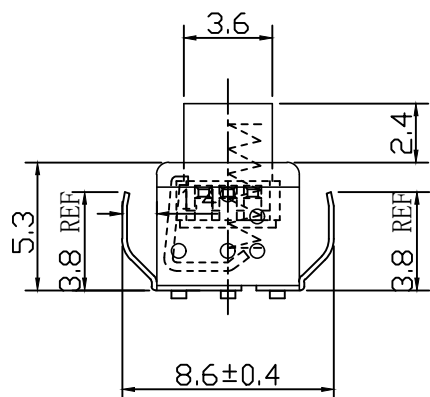
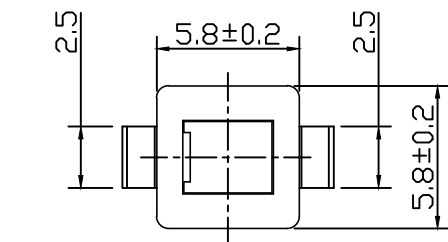






RoHS



SCHEMATIC

public errand (公差) : $\pm 0.2\text{mm}$ unit (单位) : mm



function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

9	CONTACTPIECE-2	SUS	1	Ni PLATED
8	CONTACTPIECE-1	SUS	1	Ni PLATED
7	TERMINAL	BRASS	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.5A		
Contact impedance(接触阻抗):	$\leq 100\text{m}\Omega\text{MAX}$		
Insulation impedance(绝缘阻抗):	$\geq 100\text{M}\Omega\text{MIN}$		
Welding resistance temperature(耐焊温度):	$250\pm 5^{\circ}\text{C}$		
OPERATING LIFE(电气寿命):	10,000 cycles		
Usage temperature(使用温度):	-25°C to 80°C		
Operating humidity(使用湿度):	$\leq 85\%\text{RH}$		
Trip(行程):	$1.5\pm 0.2\text{mm}$		
Operating force(操作力):	1	2	$200\pm 50\text{gf}$
	3	4	
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K8-5856S		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	± 0.2	ANGLE	APPROVAL		DATE		K8-09-2019	
			ABOVE 5 ~ 30	± 0.3							
	mm		ABOVE 30	± 0.5	$0^{\circ}\pm 3^{\circ}$	SCALE	2:1	PAGE		1 OF 1	
			ANGLE	$\pm 3^{\circ}$							

K8-5856S-□-□