


RoHS

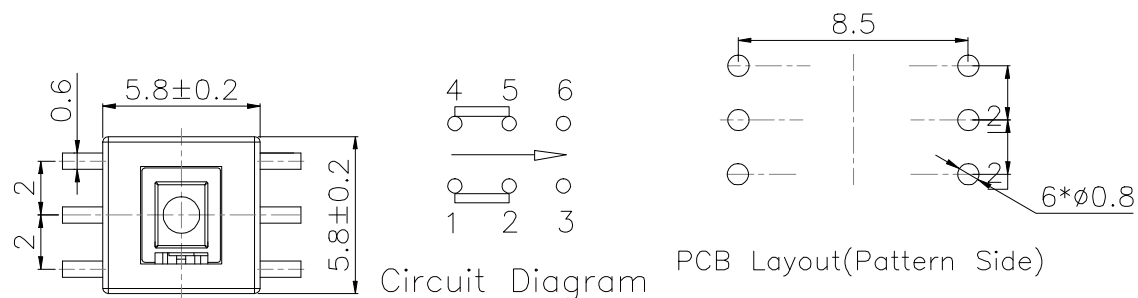

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

	TERMINAL	BRASS STRIP	3	Ag PLATED
	CASE	PA66	1	GRAY
	SPRING	SUS WIRE	1	NATURAL
	CONTACT	PBS	1	Ag PLATED
	KNOB	PA66	1	GRAY
	COVER	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.1A		
Contact impedance(接触阻抗):	≤ 30mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 °S		
OPERATING LIFE(电气寿命):	10,000 cycles		
Usage temperature(使用温度):	-25 to 80		
Operating humidity(使用湿度):	≤ 85% RH		
Trip(行程):	2.0 ± 0.2mm		
Operating force(操作力): NO.2	1	2	250 ± 50gf
	3	4	
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K8-5855D				CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL			DATE	K8-09-2019			
	mm		ABOVE 5 ~30	±0.3									
			ABOVE 30	±0.5		SCALE	2:1		PAGE	1 OF 1			
			ANGLE	±3°									

K8-5855D- -

B

A