
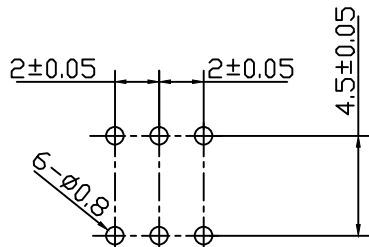


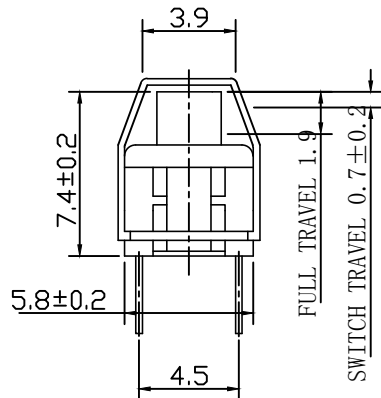
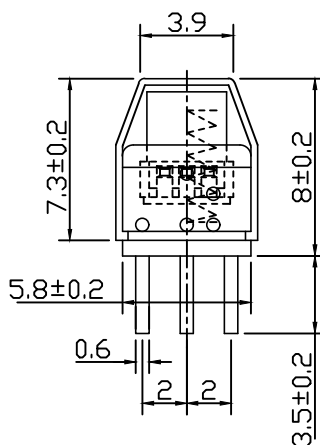







RoHS



P.C.B LAYOUT

public errand (公差) : ±0.2mm unit (单位) : mm

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material :

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8				
7	HAT	SILICA GEL	1	TRANSPARENT
6	TERMINAL	BRASS	6	Ag PLATED
5	CASE	PA66	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.5A
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE(电气寿命):	10,000 cycles
Usage temperature(使用温度):	-25 to 80
Operating humidity(使用湿度):	≤ 85% RH
Trip(行程):	1.5 ± 0.2mm
Operating force(操作力):	1 2 3 4 5 6 200 ± 50gf

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-5851EGJ			CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K8-09-2019
mm	OTHERWISE	ABOVE 5 ~ 30	±0.3	0° ± 3°	SCALE	PAGE	1 OF 1

K8-5851EGJ-□-□