



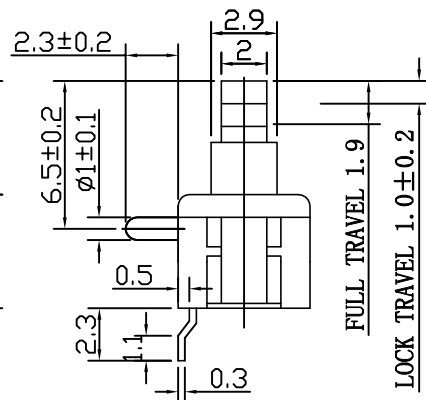
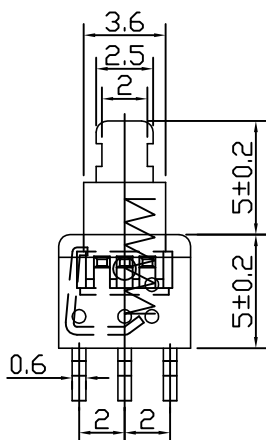






RoHS



SCHEMATIC



P. C. B LAYOUT

public errand (公差) : $\pm 0.2\text{mm}$ unit (单位) : mm

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

8				
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.5A		
Contact impedance(接触阻抗):	$\leq 100\text{m}\Omega\text{MAX}$		
Insulation impedance(绝缘阻抗):	$\geq 100\text{M}\Omega\text{MIN}$		
Welding resistance temperature(耐焊温度):	$250 \pm 5^\circ\text{C}$		
OPERATING LIFE(电气寿命):	20,000 cycles		
Usage temperature(使用温度):	-25 to 80		
Operating humidity(使用湿度):	$\leq 85\%$ RH		
Trip(行程):	$1.5 \pm 0.2\text{mm}$		
Operating force(操作力):	1	2	
	3	4	$200 \pm 50\text{gf}$
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-5854S			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE
	mm	OTHERWISE	ABOVE 5 ~30	±0.3	0°±3°	SCALE	K8-09-2019
			ABOVE 30	±0.5			PAGE
			ANGLE	±3°			1 OF 1

K8-5854S-□-□