



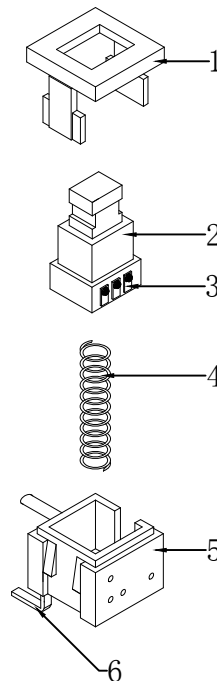
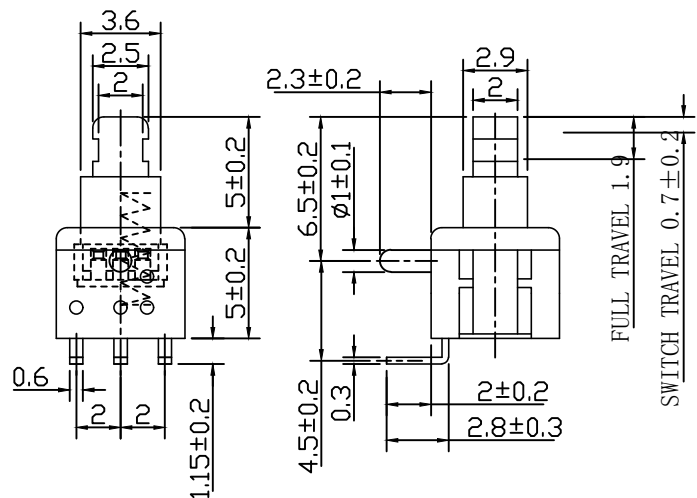


RoHS



SCHEMATIC



P. C. B LAYOUT

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

8				
7				
6	TERMINAL	BRASS STRIP	3	Ag PLATED
5	CASE	PA66	1	GRAY
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	PBS	1	Ag PLATED
2	KNOB	PA66	1	GRAY
1	COVER	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.5A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s		
OPERATING LIFE(电气寿命):	10,000 cycles		
Usage temperature(使用温度):	-25 to 80		
Operating humidity(使用湿度):	≤ 85% RH		
Trip(行程):	2.0 ± 0.2mm		
Operating force(操作力):	1	2	200 ± 50gf
	3	4	
	5	6	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-5854D			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	ANGLE	APPROVAL	DATE	K8-09-2019
			ABOVE 5 ~ 30				
	mm		±0.2	0° ± 3°	SCALE	PAGE	1 OF 1
			±0.3				
			±0.5				
			±3°				

K8-5854D - □ - □

B

A