



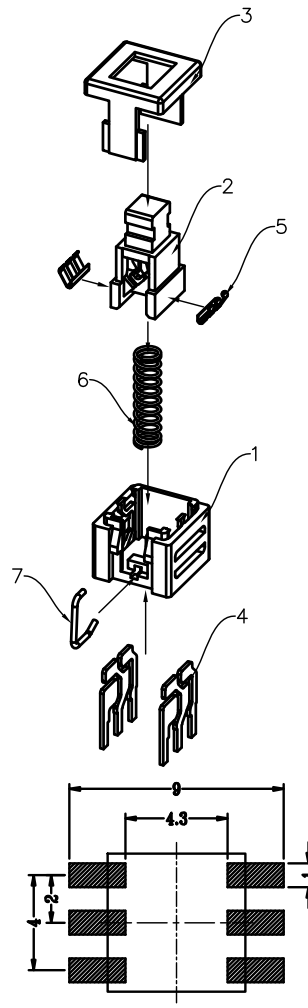


RoHS

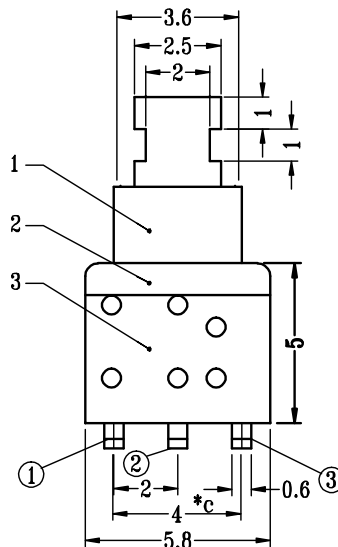

SCHEMATIC (NON-SHORTING)

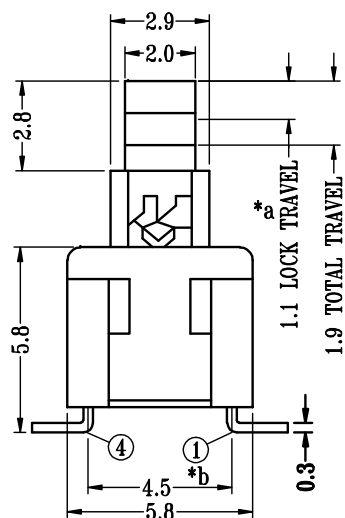

P.C.B LAYOUT
BOTTOM VIEW

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	PPA/LCP/尼龙
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 基座	PPA/LCP/尼龙
Pin 引脚	铜 (镀银)
Upper cover上盖	PPA/LCP/尼龙

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.1A
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	10,000 cycles
Usage temperature (使用温度):	-25 to 80
Operating humidity (使用湿度):	≤ 85% RH
Trip(行程):	1.5 ± 0.2mm
Operating force(操作力):	1 2 3 4 5 6 200 ± 50gf

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K8-5851S		CHECK		Z.LIU		REV.		A1	
UNIT :		TOLERANCE		APPROVAL		DATE		K8-09-2019			
mm		UP TO 5		SCALE		PAGE		1 OF 1			
		OTHERWISE									
		ANGLE									
		0°±3'									

K8-5851S-□-□