

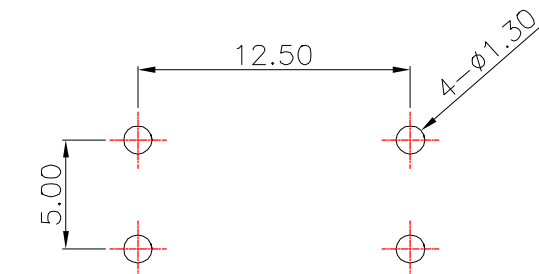




RoHS

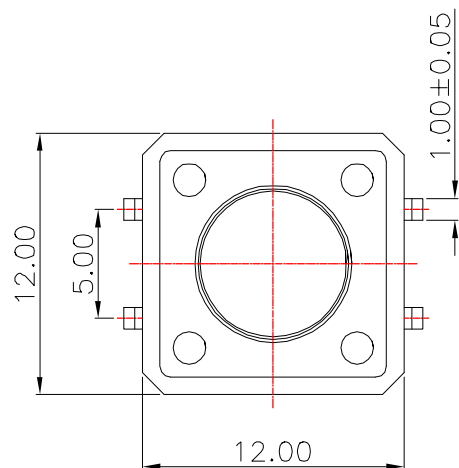

PCB Layout(Pattern side)



Circuit Diagram

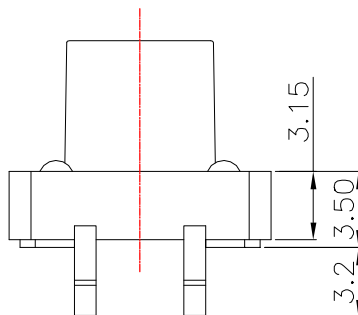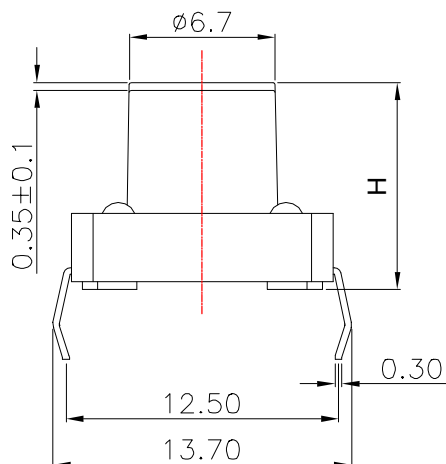

public errand (公差) : ±0.2mm unit (单位) : mm

Height(高度) : NO.1

8.5	J	13.5	T
8.0	I	13.0	S
7.5	H	12.5	R
7.0	G	12.0	Q
6.5	F	11.5	P
6.0	E	11.0	O
5.5	D	10.5	N
5.0	C	10.0	M
4.5	B	9.5	L
4.3	A	9.0	K
高度H(mm)	X=	高度H(mm)	X=

Material:

Button 按钮	PPA/LCP
Cover plate 盖板	PPA/LCP
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	100,000 cycles
Usage temperature (使用温度):	-25 to 85
Operating humidity (使用湿度):	≤ 85% RH
Trip(行程):	0.35 ± 0.1mm
Operating force(操作力):	1 90 ± 30gf 2 130 ± 30gf 3 180 ± 50gf 4 250 ± 50gf 5 350 ± 50gf 6

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH	DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K2-1103DP	CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL
mm	OTHERWISE	ABOVE 5 ~30	±0.3	0°±3°	SCALE
		ABOVE 30	±0.5		2:1
		ANGLE	±3°		PAGE
					1 OF 1

K2-1103DP-□-□