

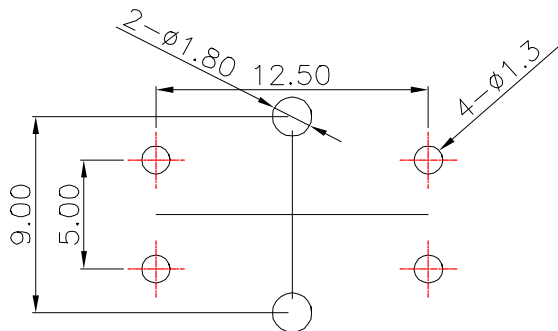




RoHS

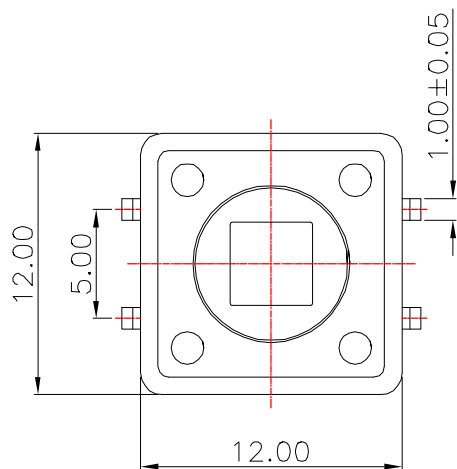

PCB Layout(Pattern side)



Circuit Diagram

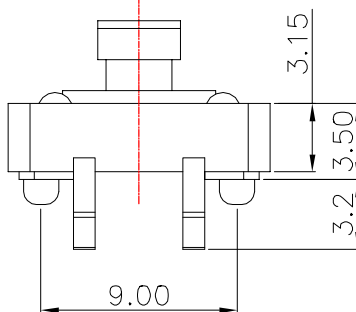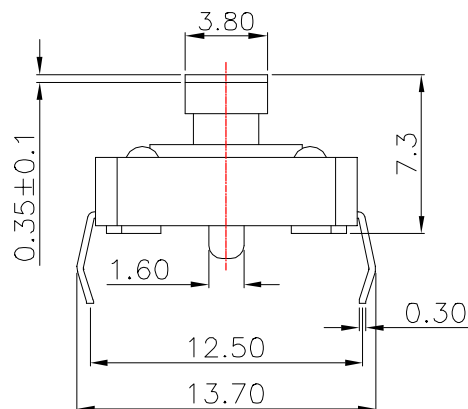

public errand (公差) : $\pm 0.2\text{mm}$ unit (单位) : mm

Height(高度) :

NO.1	
PART NO	H
D	7.3
F	

Material:

Button 按钮	PPA/LCP
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA	
Contact impedance(接触阻抗):	$\leq 100\text{m}\Omega\text{MAX}$	
Insulation impedance(绝缘阻抗):	$\geq 100\text{M}\Omega\text{MIN}$	
Welding resistance temperature(耐焊温度):	$250\pm 5^\circ\text{C}$	
OPERATING LIFE(电气寿命):	100,000 cycles	
Usage temperature(使用温度):	-25°C to 85°C	
Operating humidity(使用湿度):	$\leq 85\%\text{RH}$	
Trip(行程):	$0.35\pm 0.1\text{mm}$	
Operating force(操作力):	1 90 $\pm 30\text{gf}$	2 130 $\pm 30\text{gf}$
	3 180 $\pm 50\text{gf}$	4 250 $\pm 50\text{gf}$
	5 350 $\pm 50\text{gf}$	6

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K2-1103DT			CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	± 0.2	ANGLE	APPROVAL	DATE	K2-09-2019
mm	OTHERWISE	ABOVE 5 ~ 30	± 0.3	$0^\circ \pm 3^\circ$	SCALE	PAGE	1 OF 1
		ABOVE 30	± 0.5				
		ANGLE	$\pm 3^\circ$				

K2-1103DT-□-□