

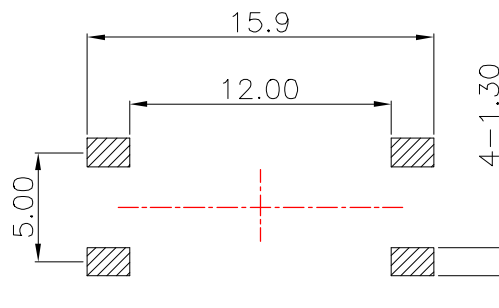
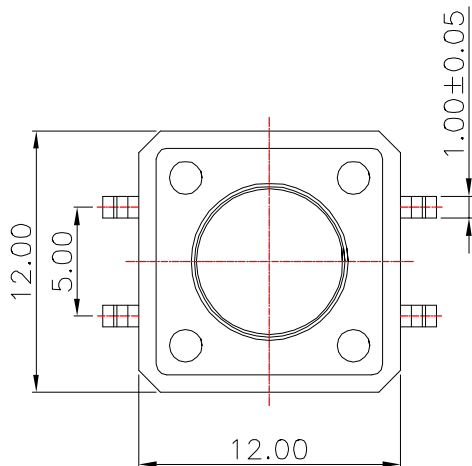



RoHS

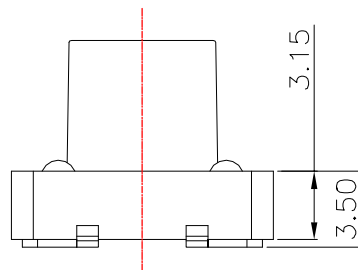

PCB Layout(Pattern side)

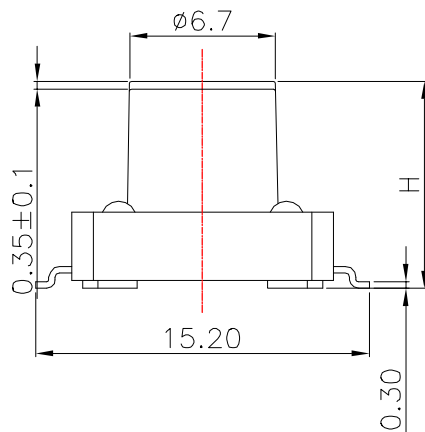

Circuit Diagram

Material:

Button 按钮	PPA/LCP
Cover plate 盖板	PPA/LCP
Shrapnel 弹片	不锈钢(复银)
Base 基座	PPA/LCP
Pin 引脚	磷铜(镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA
Contact impedance(接触阻抗):	≤100mΩMAX
Insulation impedance(绝缘阻抗):	≥100MΩMIN
Welding resistance temperature(耐焊温度):	250±5 ° 5s
OPERATING LIFE(电气寿命):	100,000 cycles
Usage temperature(使用温度):	-25 to 85
Operating humidity(使用湿度):	≤85% RH
Trip(行程):	0.35±0.1mm
Operating force(操作力):	1 90±30gf 2 130±30gf 3 180±50gf 4 250±50gf 5 350±50gf 6

NO.2

public errand(公差): ±0.2mm unit(单位): mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH	DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K2-1103SP	CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL
mm	OTHERWISE	ABOVE 5~30	±0.3	0°±3°	SCALE
		ABOVE 30	±0.5		2:1
		ANGLE	±3°		PAGE
					1 OF 1

K2-1103SP-□-□