

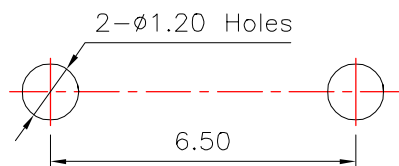
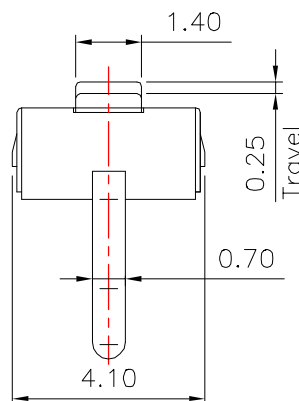
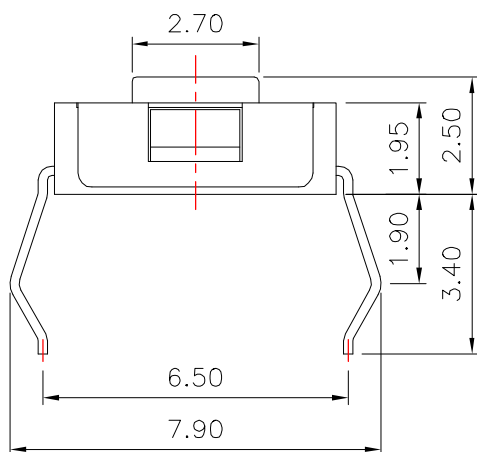
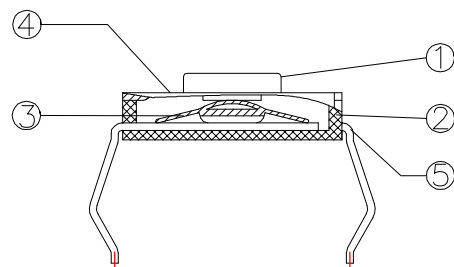


RoHS

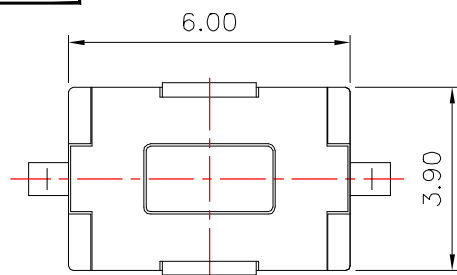

PCB Layout(Pattern Side)

Circuit Diagram

Height(高度) :

NO.1	
PART NO	H
D	2.5
F	

Material: 防水IP65

Button 按钮	PPA/LCP耐温280°C
Cover plate 盖板	铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PPA/LCP耐温280°C
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA			
Contact impedance(接触阻抗):	≤100mΩMAX			
Insulation impedance(绝缘阻抗):	≥100MΩMIN			
Welding resistance temperature(耐焊温度):	250±5 ° 5s			
OPERATING LIFE(电气寿命):	100,000 cycles			
Usage temperature(使用温度):	-25 °C to 85 °C			
Operating humidity(使用湿度):	≤85% RH			
Trip(行程):	0.25±0.1mm			
Operating force(操作力):	1	90±30gf	2	130±30gf
	3	180±50gf	4	250±50gf
	5	350±50gf	6	
	NO.2			

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K2-1107DR		CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE
	mm	OTHERWISE	ABOVE 5 ~30	±0.3			
			ABOVE 30	±0.5	0°±3°	SCALE	K2-09-2019
			ANGLE	±3°		PAGE	1 OF 1

K2-1107DR-□-□