




RoHS

4 8

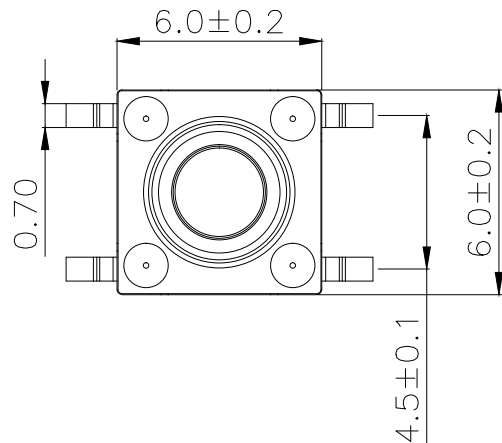

Circuit Diagram

Height(高度) :

NO.1			
PART NO	H	L	Keystoke
B	3.3	2.8	Black
A	4.3	3.15	Red
C	5.0		
G	7.0		
H	4.5		

Material: 防水等级IP67


Button 按钮	PPA/LCP
Cover plate 盖板	铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA			
Contact impedance(接触阻抗):	≤ 100mΩ MAX			
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN			
Welding resistance temperature (耐焊温度):	250 ± 5 ° 5s			
OPERATING LIFE (电气寿命):	100,000 cycles			
Usage temperature (使用温度):	-25 to 85			
Operating humidity (使用湿度):	≤ 85% RH			
Trip(行程):	0.3 ± 0.1mm			
Operating force(操作力):	1	90 ± 30gf	2	130 ± 30gf
	3	180 ± 50gf	4	250 ± 50gf
	5	350 ± 50gf	6	
	NO.2			

NO.2

PCB Layout(Pattern side)

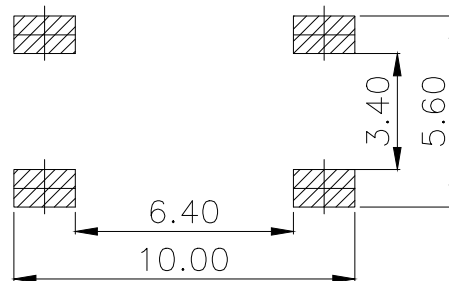

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K2-1110SP		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE		K2-09-2019	
			ABOVE 5 ~30	±0.3							
	mm		ABOVE 30	±0.5	0°±3°	SCALE	2:1	PAGE		1 OF 1	
			ANGLE	±3°							

K2-1110SP-□-□