

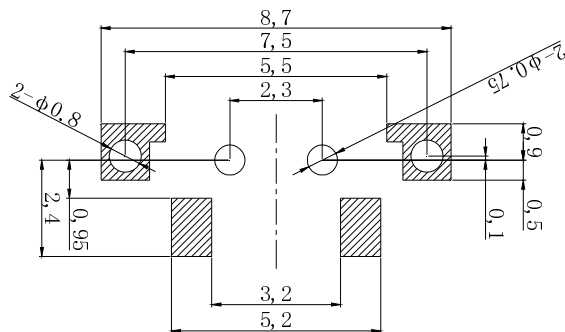
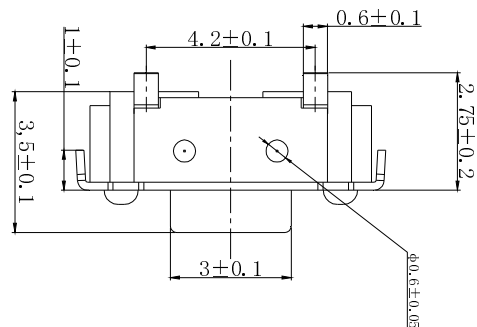




RoHS

4 8

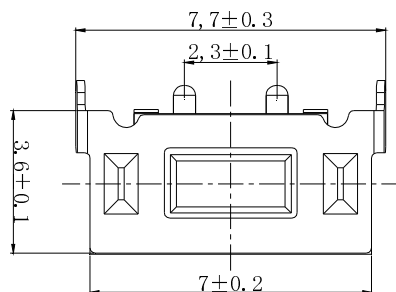

电器原理图

P C B 参考图

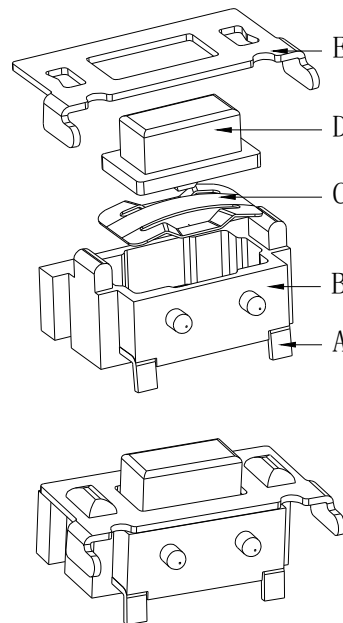

Height(高度) :

NO.1	
PART NO	H
D	3.5
F	3.8

Material:

Button 按钮	PPA/LCP耐温280℃
Cover plate 盖板	铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PPA/LCP耐温280℃
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA	
Contact impedance(接触阻抗):	≤100mΩMAX	
Insulation impedance(绝缘阻抗):	≥100MΩMIN	
Welding resistance temperature(耐焊温度):	250±5 ° 5s	
OPERATING LIFE (电气寿命):	100,000 cycles	
Usage temperature (使用温度):	-25 °C to 85 °C	
Operating humidity (使用湿度):	≤85% RH	
Trip(行程):	0.25±0.1mm	
Operating force(操作力):	1	90±30gf
	2	130±30gf
	3	180±50gf
	4	250±50gf
NO.2	5	350±50gf
	6	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY	
PART NO.		K2-1112SW			CHECK	Z.LIU	REV.	A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K2-09-2019	
	mm		ABOVE 5 ~30	±0.3		SCALE	2:1	PAGE	1 OF 1
				ABOVE 30		±0.5			
			ANGLE	±3°					

K2-1112SW-□-□