

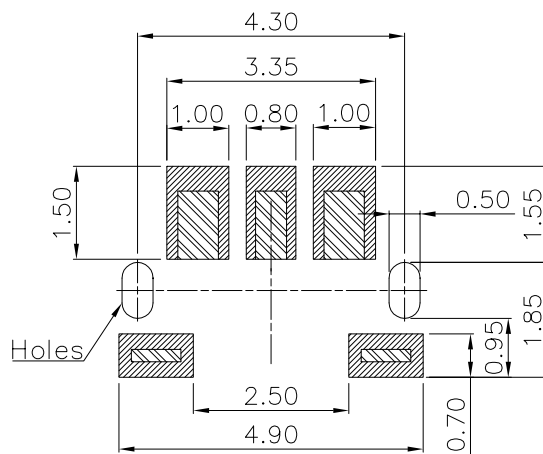


RoHS

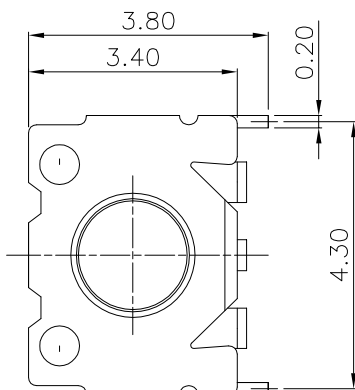

PCB Layout(Pattern side)



Circuit Diagram

Height(高度) :



NO.1	
PART NO	H
D	3.5
F	

Material:

Button 按钮	硅胶 (蓝色)
Cover plate 盖板	磷铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	LCP 耐温 280℃
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA
Contact impedance(接触阻抗):	≤100mΩMAX
Insulation impedance(绝缘阻抗):	≥100MΩMIN
Welding resistance temperature(耐焊温度):	250±5 ° 5s
OPERATING LIFE (电气寿命):	100,000 cycles
Usage temperature (使用温度):	-25 °C to 85 °C
Operating humidity (使用湿度):	≤85% RH
Trip(行程):	0.2±0.05mm
Operating force(操作力):	1 180±35gf 2 250±35gf

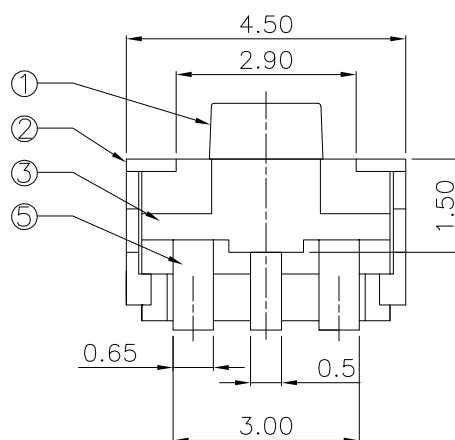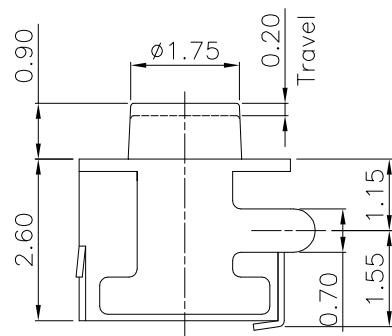

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K2-1812GA			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	ANGLE	APPROVAL	DATE	K2-09-2019
			ABOVE 5 ~30				
	mm		ABOVE 30	0°±3°	SCALE	PAGE	1 OF 1
			ANGLE				

K2-1812GA-□-□