

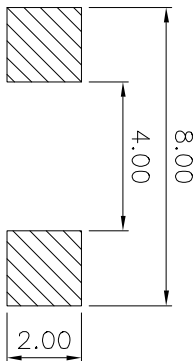




RoHS



PCB Layout(Pattern side)



Circuit Diagram

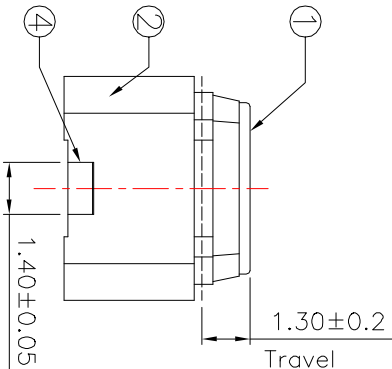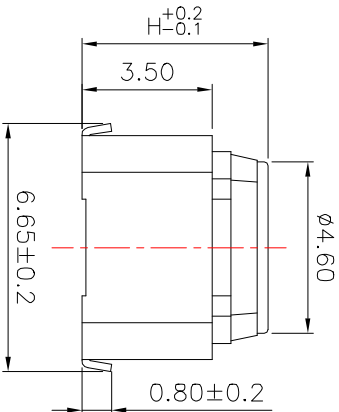

Height (高度) :

NO.1		
PART NO	H	
D	4.3	
F	5.0	

Material:

Button 按钮	PBT/LCP耐温
Cover plate 盖板	铜 (镀银)
Strapnel 弹片	不锈钢 (复银)
Base 基座	PBT /LCP耐温
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷) :	DC 12V 50mA
Contact impedance(接触阻抗) :	≤100m Ω MAX
Insulation impedance(绝缘阻抗) :	≥100M Ω MIN
Welding resistance temperature(耐焊温度) :	250±5° 5s
OPERATING LIFE (电气寿命) :	100,000 cycles
Usage temperature (使用温度) :	-25 °C to 85 °C
Operating humidity (使用湿度) :	≤85% RH
Trip(行程) :	1.3±0.2mm
Operating force(操作力) :	1 90±30gf 2 130±30gf 3 180±50gf 4 250±50gf 5 300±50gf 6
NO.2	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D

K2-1817UQ-□-□

B

A

F

E

D

C

B

A