


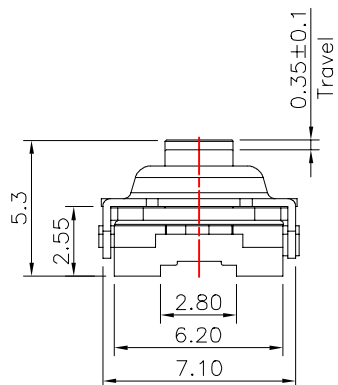
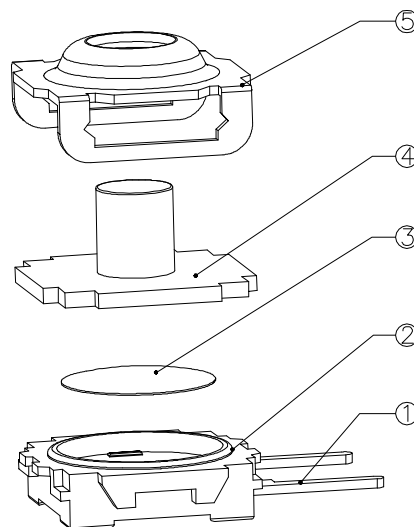

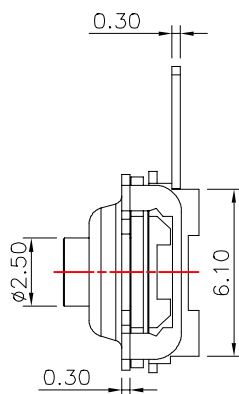


RoHS

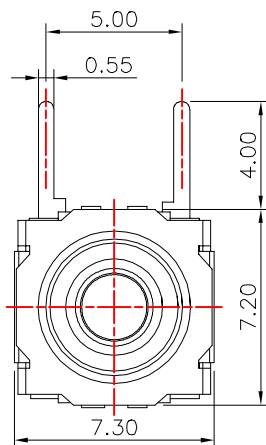

PCB Layout(Pattern side)



Height(高度) :

NO.1	
PART NO	H
D	
F	5.3

防水等级IP66

Material:

Button 按钮	SLILICA GEL
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PPA/PBT/LCP耐温280
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s		
OPERATING LIFE (电气寿命):	100,000 cycles		
Usage temperature (使用温度):	-25 to 85		
Operating humidity (使用湿度):	≤ 85% RH		
Trip(行程):	0.35 ± 0.10mm		
Operating force(操作力):	1	2	
	3	4	250 ± 50gf
	5	6	
	350 ± 50gf		

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K2-1846DF		CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE	K2-09-2019
	mm	OTHERWISE	ABOVE 5 ~30	±0.3			
			ABOVE 30	±0.5	SCALE	PAGE	1 OF 1
			ANGLE	±3°			

K2-1846DF-□-□