
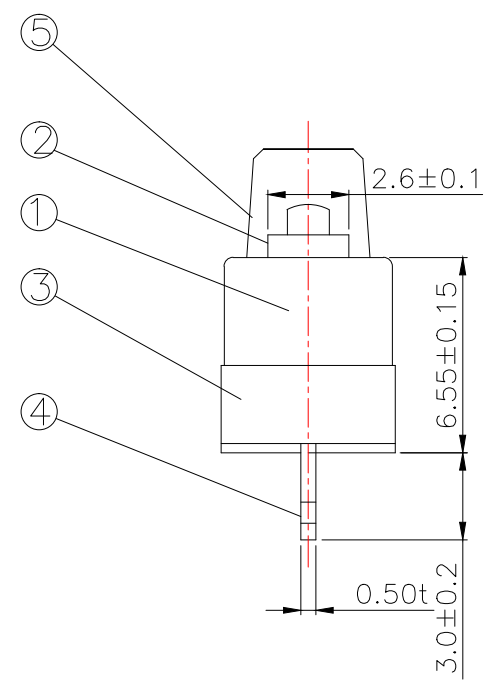
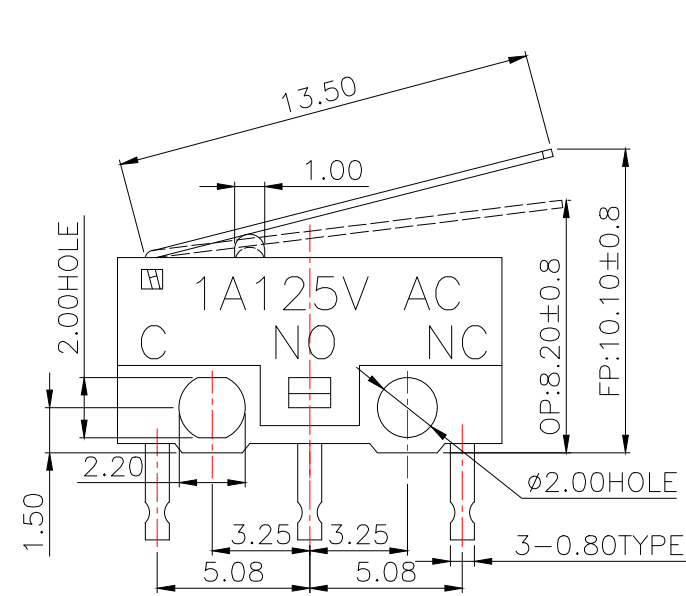
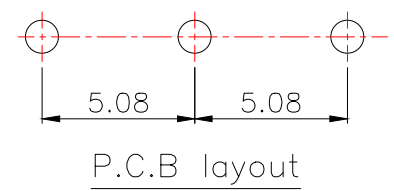
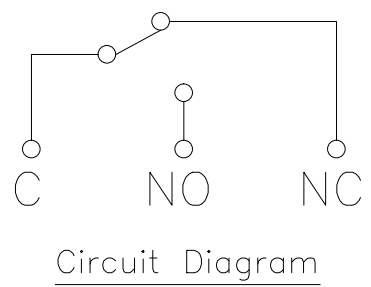


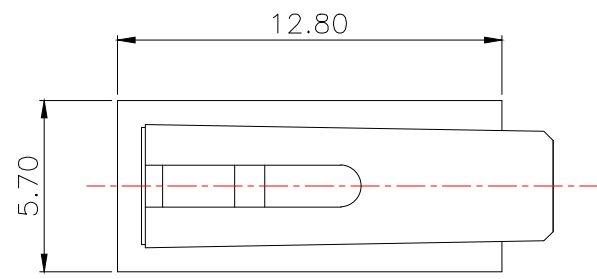

NOTE:
1.Rating:DC30V 0.1A
2.OP:8.20±0.8
3.Operating froce:30±15gf
4.Mechanical Life:1,000,000

⑦	Shrapnel	——	1	Beryllium Copper	———	———	
⑥	Contact	——	1	Silver Alloy	———	———	
⑤	Lever	——	1	SUS	———	———	
④	Terminal	——	3	Brass(0.50t)	Plating silver	———	
③	Housing	——	1	PBT	White	———	
②	Knob	——	1	PBT	White	———	
①	Cover	——	1	PBT	Black	———	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN		S.L.L		2019.09.3			
CHECKED				TITLE:		MICRO SWITCHS	
APPROVALS				PART NO.		K9-1267H	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2°		DRAWING NO.		———	SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.