

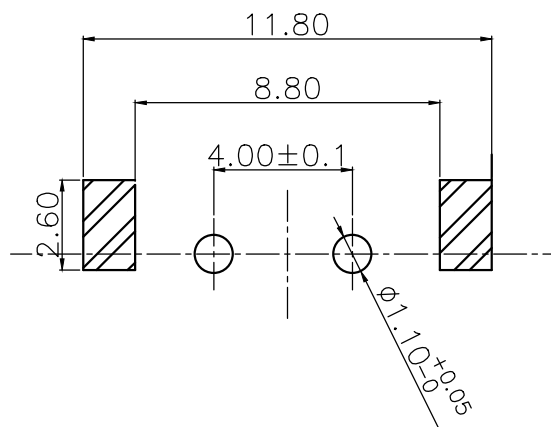
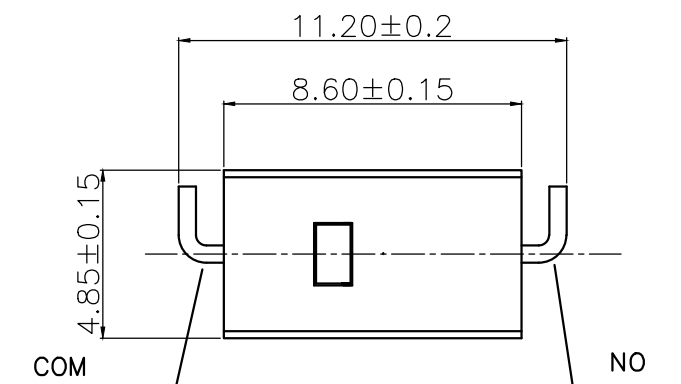


ROHS


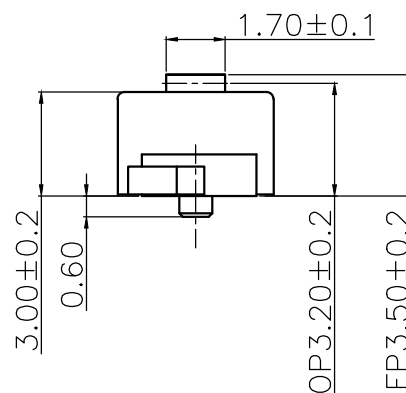


NOTE:

- 1.Rating: DC 6V 1mA(Min load DC 3V 15uA).
- 2.Contact resistance: 100mΩ Max.
- 3.Insulation resistance: 100MΩ Min(at DC 500V)
- 4.Withstand voltage: AC 600V(50-60Hz) for 1 minute
- 5.OP: 3.2±0.2mm.
- 6.Return force: 15gf Min.
- 7.Mechanical Life: 5,000,000
- 8.Operating temperature:-25°C to 85°C

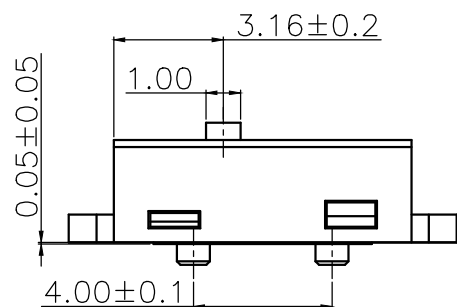

PART NO	vigor(gf)
K9-8601B-01	60±20
K9-8601B-02	90±20
K9-8601B-03	120±30

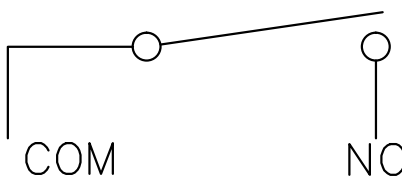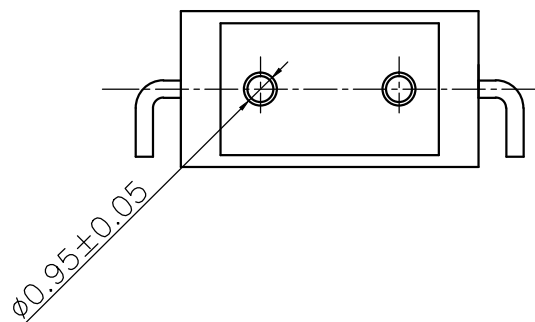

⑥	Knob	—	1	PPA	White	—
⑤	Cover	—	1	PPA	Black	—
④	Shrapnel	—	1	Copper alloy	Material	—
③	Contact	—	1	Silver alloy	Material	—
②	Housing	—	1	LCP	Black	—
①	Terminal	—	2	Brass	Plating silver	—

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.09.3				
CHECKED				TITLE:	MICRO SWITCH	
APPROVALS				PART NO.		
TOLERANCES ARE			30~以上 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
			±2'	DRAWING NO.		PROJ:
						SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			