

RS2型旋转开关系列

Rstwo Serial Selector Switch Series

- 特点
- 切换手感好，档位清晰
 - 多种输入和输出可供选择
 - 多种转轴轴长度可供选择
 - 多种外形尺寸可供选择
 - 进口材质的零件可以保证产品的性能

Features

- The feel is good, Positions number is clear
- Selection of a variety of input and output
- Selection of a variety of shaft axis length
- A variety of shape size to choose from
- Spare parts are imported material to ensure the performance of our products



- 应用

电风扇 | 榨汁机 | 电烤箱 | 电炖锅 | 电暖浴霸 | 窗机
空调器等家用电器 | 工业用电器及其他类似的电器设备

Application

Electric fan | juicer | electric oven | slow Cooker
water heater | electric heating bath bully | air conditioner
Such as household appliances | industrial appliances and
other electrical equipment

项目 Item		特性值 Value
绝缘电阻 Insulation resistance		≥100MΩ (500VDC)
接触电阻 Contact resistance		≤30mΩ (初始值) (Initial value)
耐电压 Test voltage	同极不相接端子间 Between terminals of the same polarity	AC1000V,50/60Hz,1min
	带电金属零件与地 (外壳) 之间、接线端 与不带电金属件之间 Between current-carrying metal parts and ground(case),and between each terminal and non-current-carrying metal parts.	AC2000V,50/60Hz,1min
寿命 Life expectancy		机械≥100000次 ; Mechanical≥100000 cycles
		电气 Electrical ≥10000次 ; Electrical≥10000 cycles 6A/8A/10A 125/250V AC 3E4(CQC、CB、TUV)

- 型号规格命名及含义 | Model specs naming and meanings


RS2-☐ ☐ ☐ ☐

1 2 3 4



1 点动 Crawl	D:点动 Crawl A:无点动 No point move	4 端子数量 Terminal number	3:3脚 Feet 3 4:4脚 Feet 4 5:5脚 Feet 5 9:9脚 Feet 9
2 角度 Angle	A:30° B:36° C:45° D:90°	5 转轴长度 Terminal number	A:常规 Normal B:加长 Long
3 档位数 Number of gears	1:1档 Positions number 1 2:2档 Positions number 2 3:3档 Positions number 3 4:4档 Positions number 4	6 特殊要求 Special Requirements	特殊要求 Special Requirements

- RS2外形尺寸安装图 | Dimensions



RS2-DC45A

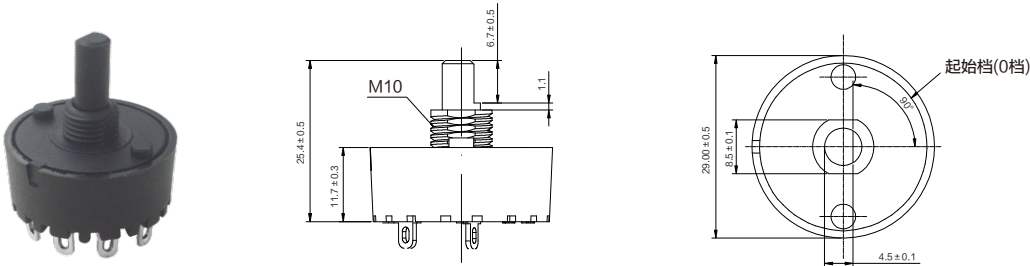

RS2-DB67A



RS2-AA67A

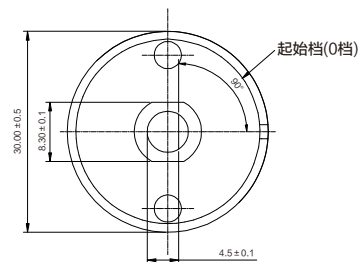

- RS2系列旋转开关部分功能档位切换程序图 | RS2 series rotary switch features gear switch program chart

RS2-DC24A\B

档位	45°	P档	0档	1档	2档
转轴位置					
端口	PL0	L1	L2	L3	
接通					
表示线路接通					

RS2-AB78A\B

档位	36°	0档	1档	2档	3档	4档	5档	6档	7档
转轴位置									
端口	L0	L1	L2	L3	L4	L5	L6	L7	
接通									
表示线路接通									

RS2-DC23A\B

档位	45°	P档	0档	1档
转轴位置				
端口	PL0	L1	L2	
接通				
表示线路接通				

RS2-DB67A\B

档位	36°	P档	0档	1档	2档	3档	4档	5档
转轴位置								
端口	PL9	L0	L1	L2	L3	L4	L5	
接通								
表示线路接通								

RS2-DC23A\B

档位	45°	左档	0档	右档
转轴位置				
端口	L0	L1	L2	
接通				
表示线路接通				

RS2-AC34A\B

档位	45°	0档	1档	2档	3档
转轴位置					
端口	L1	L2	L3	L4	
接通					
表示线路接通					

RS2-DC34A\B

档位	45°	P档	0档	1档	2档	3档
转轴位置						
端口	PL0	L1	L2	L3	L4	
接通						
表示线路接通						

RS2-DC67A\B

档位	45°	P档	0档	1档	2档	3档	4档	5档
转轴位置								
端口	PL0	L1	L2	L3	L4	L5	L6	
接通								
表示线路接通								

RS2-AC23A\B

档位	45°	0档	1档	2档
转轴位置				
端口	L1	L2	L3	
接通				
表示线路接通				