
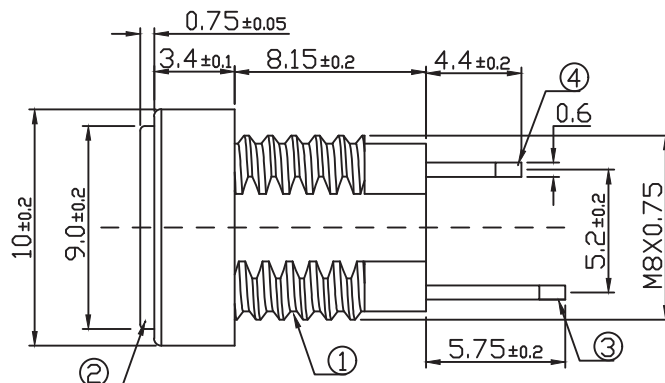




RoHS

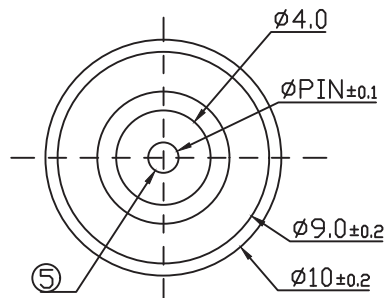

NO1.


PIN	1.3	2.0	2.35	2.5
APPD	1	2	3	4

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-sided view)

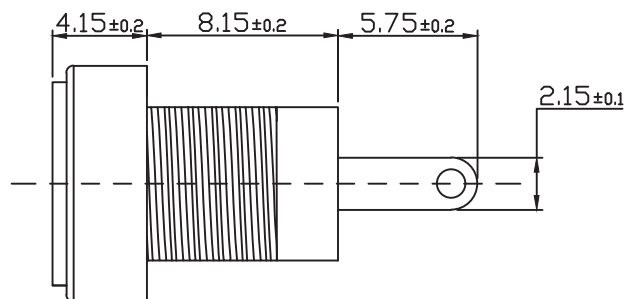


Material:

contact pin插针	Au
plastic cement塑胶	Nylon尼龙/PA46
Pin 引脚	Au
CONTACT A (P脚A)	Au

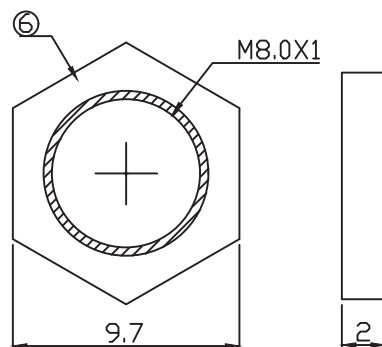

SCHEMATIC

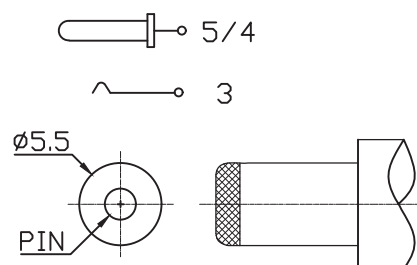

Main technical specifications:

Rated load(额定负荷):	DC12V 3A
Contact impedance(接触阻抗):	$\leq 100m\Omega$ MAX
Insulation impedance(绝缘阻抗):	$\geq 100M\Omega$ MIN
Welding resistance temperature(耐焊温度):	$250 \pm 5^\circ$ 5s
OPERATING LIFE(电气寿命):	5,000 cycles
Usage temperature(使用温度):	-20°C to 70°C
Operating humidity(使用湿度):	$\leq 85\%$ RH
Insertion and Extraction Force(插拔力)	3~30N
	1 2 3 4 5 6

public errand (公差): $\pm 0.2\text{mm}$ unit (单位): mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

PART NAME	DC JACK	DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	DC-022B	CHECK	Z.LIU	REV.	A1
UNIT :	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	APPROVAL		DATE	DC-09-2019
mm	± 0.2 ± 0.3 ± 0.5 $\pm 3^\circ$	SCALE	2:1	PAGE	1 OF 1

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

DC-022B-口