

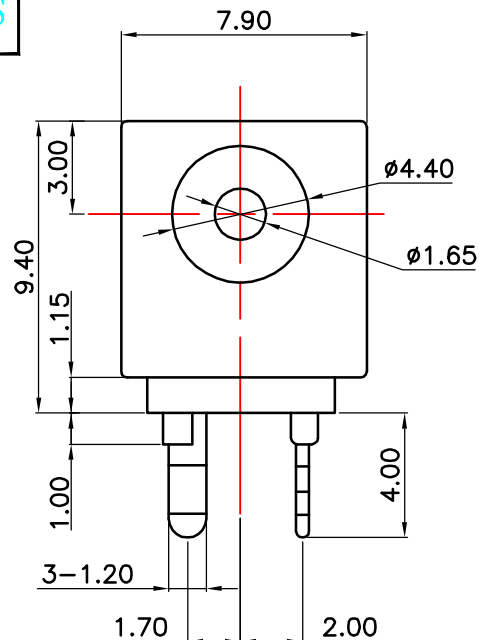




RoHS

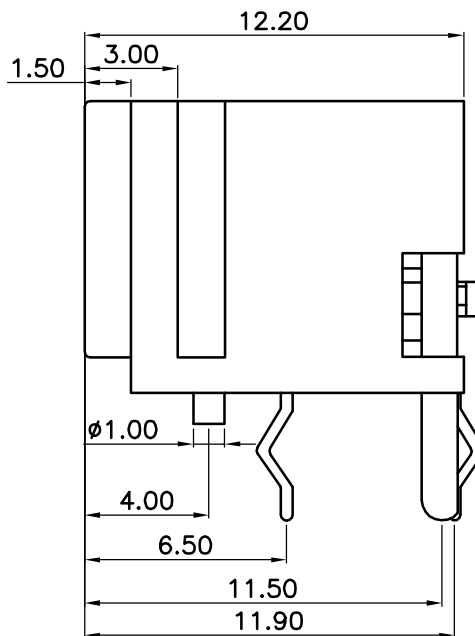

P.C.B LAYOUT (copper-sided view)

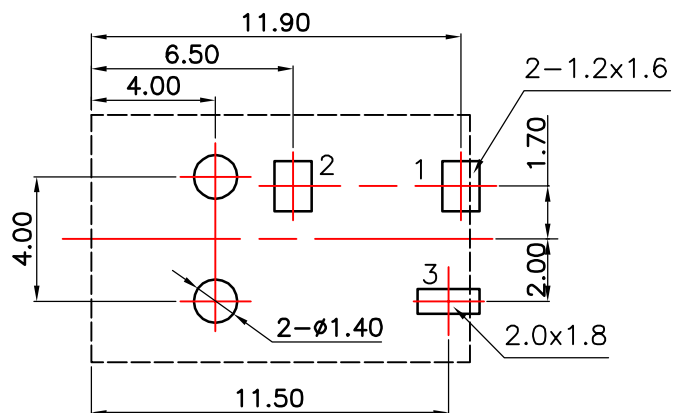

DC MATE PLUG

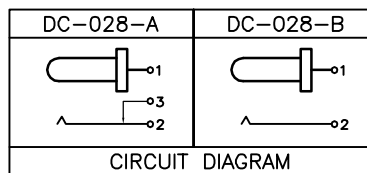

Material:

contact pin插针	Au
plastic cement塑胶	Nylon尼龙/PA46
Pin 引脚	Au
CONTACT A(P脚A)	Au

Main technical specifications:

Rated load(额定负荷):	DC30V 0.5A
Contact impedance(接触阻抗):	$\leq 100m\Omega$ MAX
Insulation impedance(绝缘阻抗):	$\geq 100M\Omega$ MIN
Welding resistance temperature(耐焊温度):	$250\pm 5^{\circ}C$ 5s
OPERATING LIFE(电气寿命):	5,000 cycles
Usage temperature(使用温度):	$-20^{\circ}C$ to $70^{\circ}C$
Operating humidity(使用湿度):	$\leq 85\%$ RH
Insertion and Extraction Force(插拔力)	3~20N

public errand (公差) : $\pm 0.2mm$ unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC JACK	DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	DC-028	CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	APPROVAL	DATE	DC-09-2019	
mm	OTHERWISE	SCALE	PAGE	1 OF 1	

DC-028-□