

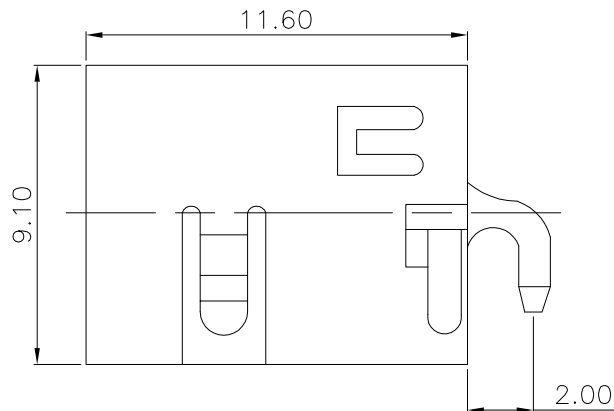
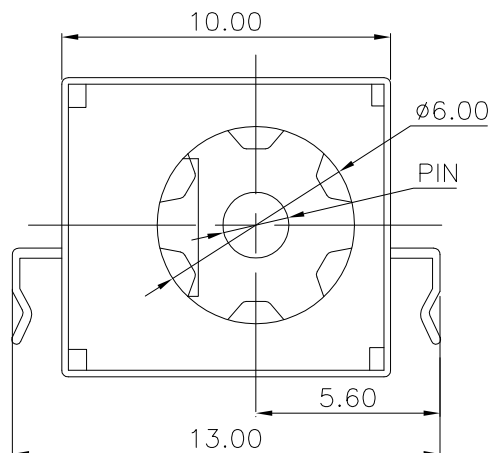


RoHS



P.C.B LAYOUT TOP VIEW

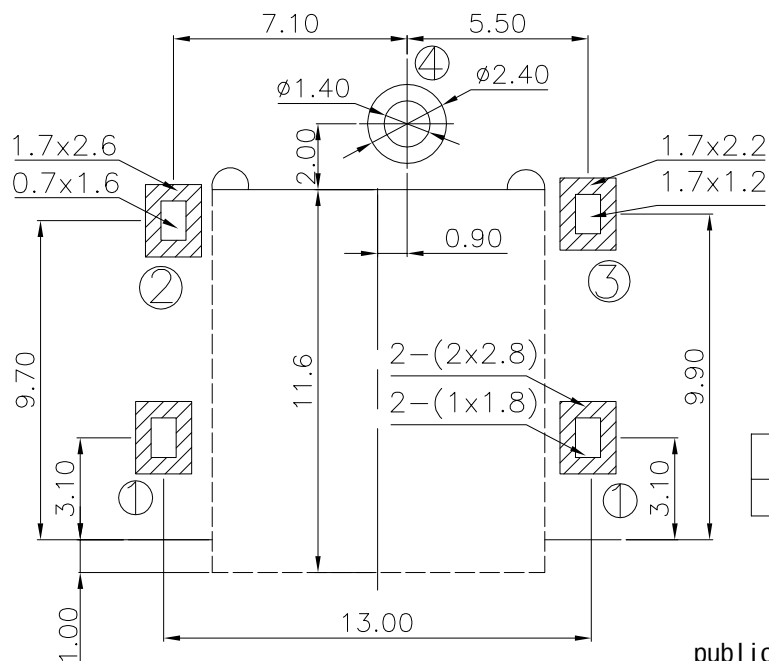

|      |      |     |     |
|------|------|-----|-----|
| PIN  | 1.65 | 2.0 | 2.5 |
| APPD | 165  | 20  | 25  |

Material:

|                  |              |
|------------------|--------------|
| contact pin插针    | Au           |
| plastic cement塑胶 | Nylon尼龙/PA46 |
| Pin 引脚           | Au           |
| CONTACT A(P脚A)   | Au           |

Main technical specifications:

|                                       |              |
|---------------------------------------|--------------|
| Rated load(额定负荷):                     | DC24V 5A     |
| Contact impedance(接触阻抗):              | ≤ 100mΩ MAX  |
| Insulation impedance(绝缘阻抗):           | ≥ 100MΩ MIN  |
| Welding resistance temperature(耐焊温度): | 250 ± 5 ° 5s |
| OPERATING LIFE(电气寿命):                 | 5,000 cycles |
| Usage temperature(使用温度):              | -20 to 70    |
| Operating humidity(使用湿度):             | ≤ 85% RH     |
| Insertion and Extraction Force(插拔力)   | 3 ~ 20N      |

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

|           |         |           |              |         |          |          |            |
|-----------|---------|-----------|--------------|---------|----------|----------|------------|
| PART NAME | DC JACK |           |              | DRAWING | G.L CHEN | DWG.No.  | LCZY       |
| PART NO.  | DC-028S |           |              | CHECK   | Z.LIU    | REV.     | A1         |
|           | UNIT :  | TOLERANCE | UP TO 5      | ±0.2    | ANGLE    | APPROVAL | DATE       |
|           | mm      | OTHERWISE | ABOVE 5 ~ 30 | ±0.3    | 0° ± 3°  | SCALE    | DC-09-2019 |
|           |         |           | ABOVE 30     | ±0.5    |          |          | PAGE       |
|           |         |           | ANGLE        | ±3°     |          |          | 1 OF 1     |

DC-028S-□