

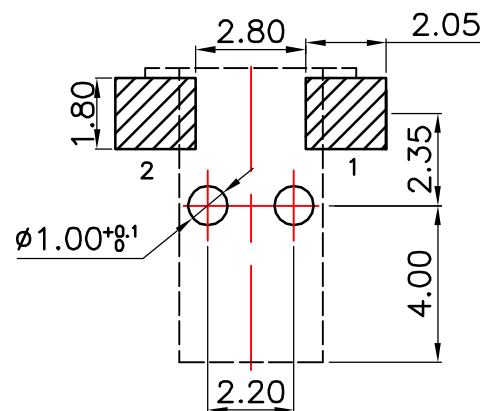
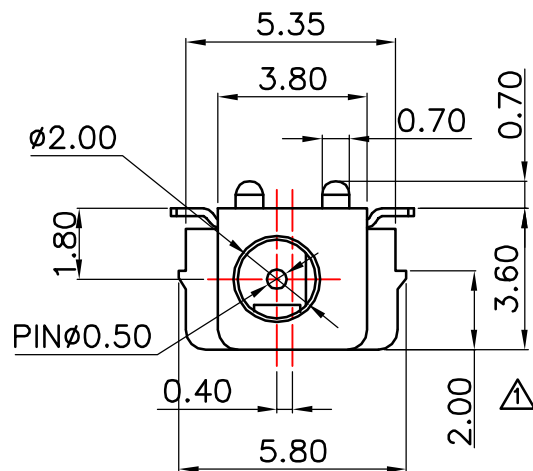


RoHS



P.C.B Layout(Pattern Side)

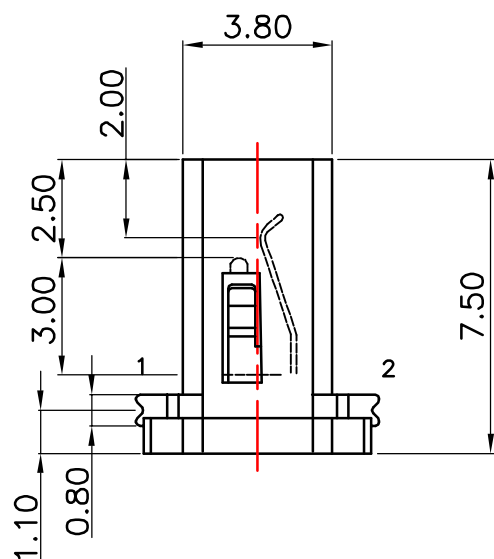

Material:

contact pin 插针	Au
plastic cement 塑胶	Nylon尼龙/PA46
Pin 引脚	Au
CONTACT A(P脚A)	Au

Main technical specifications:

Rated load (额定负荷):	DC30V 0.5A		
Contact impedance (接触阻抗):	≤100mΩ MAX		
Insulation impedance (绝缘阻抗):	≥100MΩ MIN		
Welding resistance temperature (耐焊温度):	250±5 °Ss		
OPERATING LIFE (电气寿命):	5,000 cycles		
Usage temperature (使用温度):	-20 °C to 70 °C		
Operating humidity (使用湿度):	≤85% RH		
Insertion and Extraction Force (插拔力)	3~20N		
	1	2	
	3	4	
	5	6	

public errand (公差) : ±0.2mm unit (単位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC JACK				DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		DC-060S				CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL			DATE		DC-09-2019		
	mm		ABOVE 5 ~30	±0.3									
			ABOVE 30	±0.5	0'±3'	SCALE	2:1		PAGE		1 OF 1		
			ANGLE	±3'									

DC-060S

B

A