
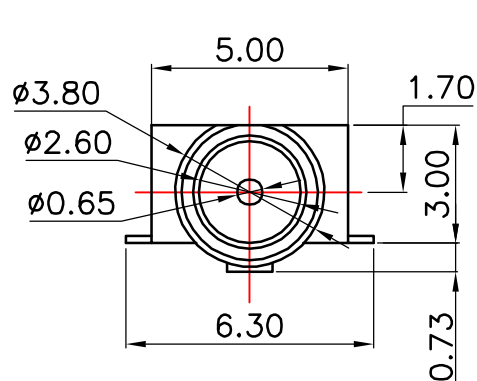

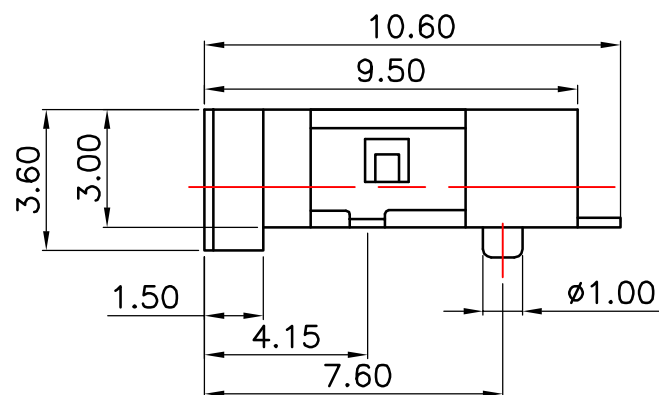



RoHS

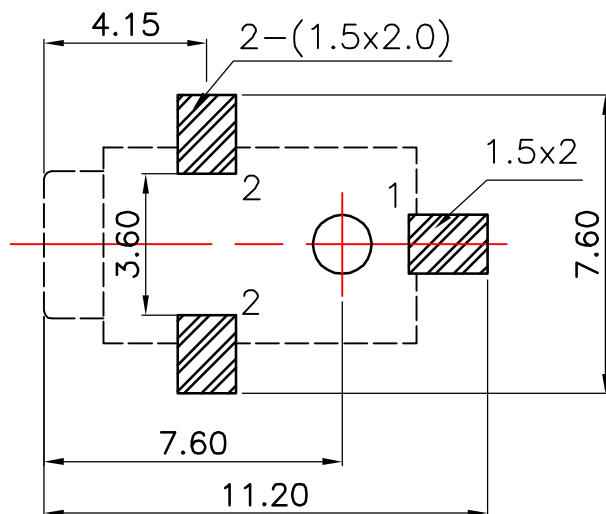

P.C.B LAYOUT TOP VIEW

 $\wedge_{o2}$

CIRCUIT DIAGRAM

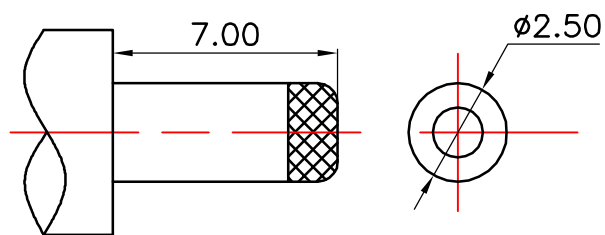

DC MATE PLUG

Material:

contact pin 插针	Au
plastic cement 塑胶	Nylon 尼龙/PA46
Pin 引脚	Au
CONTACT A(P脚A)	Au

Main technical specifications:

Rated load (额定负荷):	DC30V 0.5A		
Contact impedance (接触阻抗):	≤100mΩ MAX		
Insulation impedance (绝缘阻抗):	≥100MΩ MIN		
Welding resistance temperature (耐焊温度):	250±5 ° 5s		
OPERATING LIFE (电气寿命):	5,000 cycles		
Usage temperature (使用温度):	-20 °C to 70 °C		
Operating humidity (使用湿度):	≤85% RH		
Insertion and Extraction Force (插拔力)	3~20N		
	1	2	
	3	4	
	5	6	

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC JACK				DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		DC-061S				CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	DC-09-2019
	mm		ABOVE 5 ~30	±0.3		ABOVE 30	±0.5		
			ANGLE	±3°	SCALE	2:1	PAGE	1 OF 1	

public errand (公差) : ±0.2mm unit (単位) : mm