

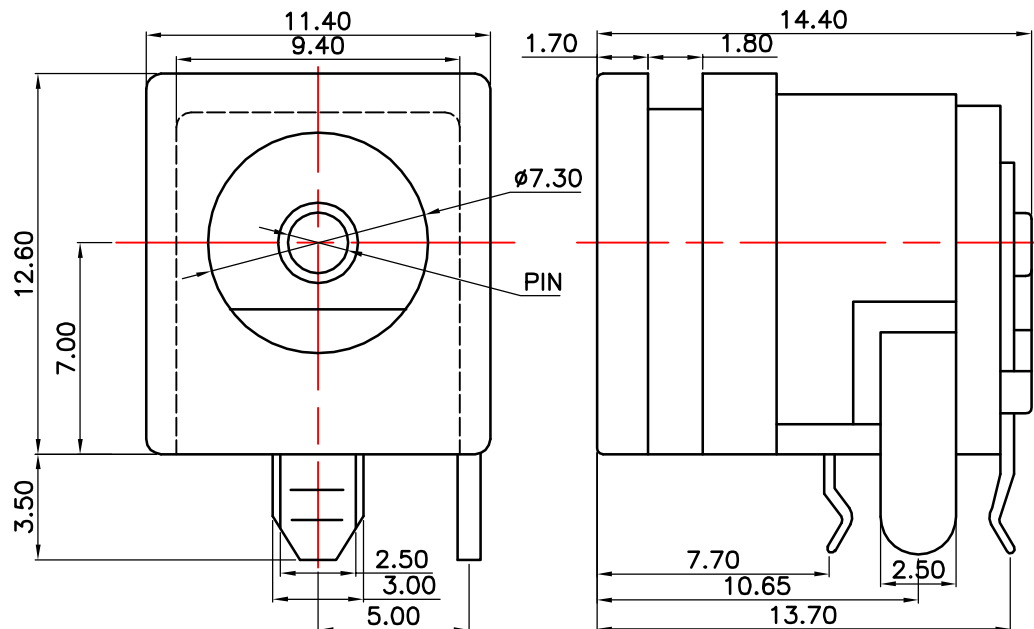
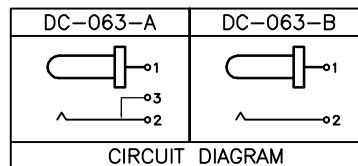


RoHS

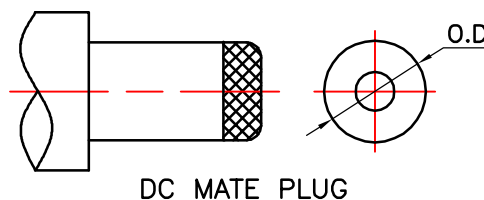

P.C.B LAYOUT(copper-sided view)

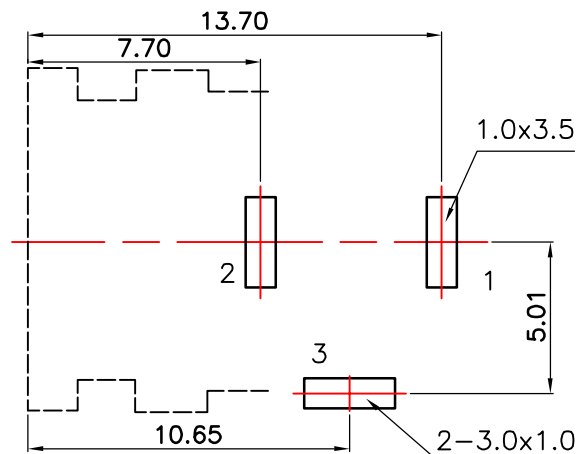

Model No.	1	2	3
PIN	$\phi 2.0$	$\phi 2.5$	$\phi 3.0$
DC PLUG O.D.	$\phi 5.5$	$\phi 5.5$	$\phi 6.55$

Material:

contact pin插针	Au
plastic cement塑胶	Nylon尼龙/PA46
Pin 引脚	Au
CONTACT A(P脚A)	Au

Main technical specifications:

Rated load(额定负荷):	DC30V 0.5A
Contact impedance(接触阻抗):	$\leq 100m\Omega$ MAX
Insulation impedance(绝缘阻抗):	$\geq 100M\Omega$ MIN
Welding resistance temperature(耐焊温度):	$250 \pm 5^{\circ}C$ 5s
OPERATING LIFE(电气寿命):	5,000 cycles
Usage temperature(使用温度):	-20 to 70
Operating humidity(使用湿度):	$\leq 85\%$ RH
Insertion and Extraction Force(插拔力)	3~20N

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		DC JACK				DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		DC-063				CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	± 0.2	ANGLE	APPROVAL	DATE	PAGE	DC-09-2019
	mm			± 0.3 ± 0.5 $\pm 3^{\circ}$		$0^{\circ} \pm 3^{\circ}$			
1 OF 1									