
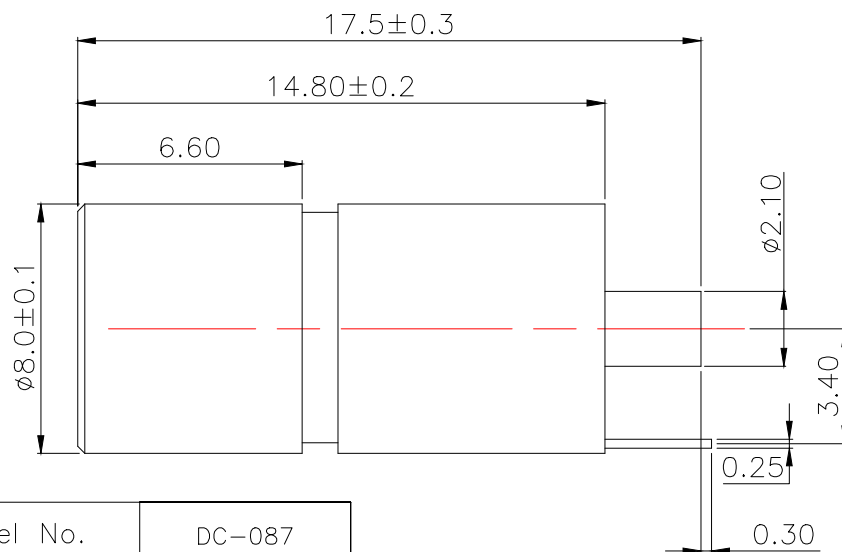


RoHS

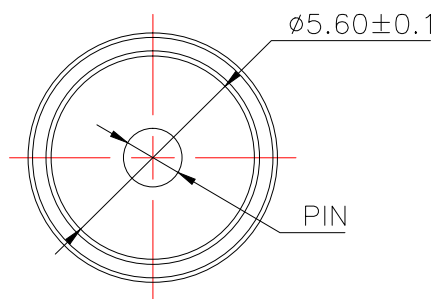

Model No.	DC-087
Schematic	

Model No.	1	2	3
PIN	$\phi 1.65$	$\phi 2.0$	$\phi 2.5$

Material:

contact pin插针	Au
plastic cement塑胶	Nylon尼龙
Pin 引脚	Au
CONTACT A(P脚A)	Au

Main technical specifications:

Rated load(额定负荷):	DC30V 3A
Contact impedance(接触阻抗):	$\leq 100m\Omega$ MAX
Insulation impedance(绝缘阻抗):	$\geq 100M\Omega$ MIN
Welding resistance temperature(耐焊温度):	$250 \pm 5^\circ C$ 5s
OPERATING LIFE(电气寿命):	5,000 cycles
Usage temperature(使用温度):	$-20^\circ C$ to $70^\circ C$
Operating humidity(使用湿度):	$\leq 85\%$ RH
Insertion and Extraction Force(插拔力)	3~20N
	1 2
	3 4
	5 6

public errand (公差) : $\pm 0.2mm$ unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC JACK	DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	DC-087	CHECK	Z.LIU	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	APPROVAL	DATE	DC-09-2019
		SCALE	2:1	PAGE	1 OF 1

DC-087-□