


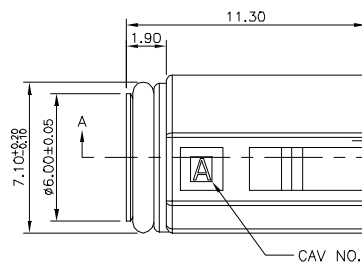



RoHS

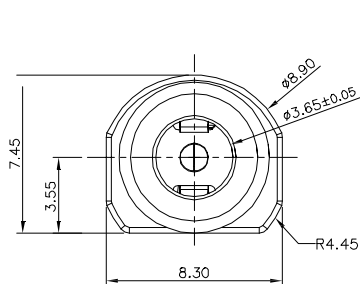



3D VIEW

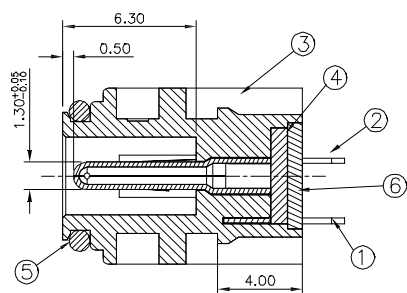



SECTION A-A



SCHEMATIC

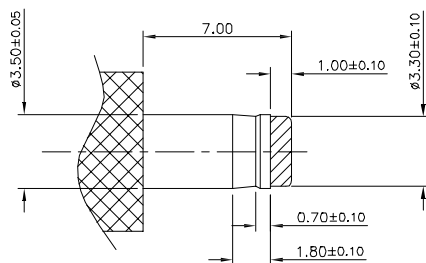

(ø3.50mm DC PLUG DETAIL DRAWING)

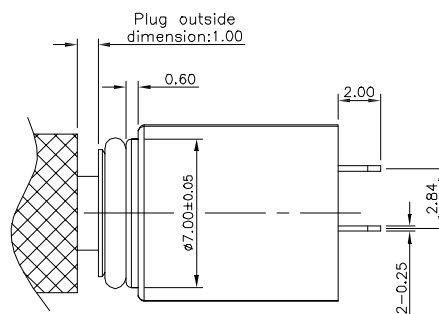

3D VIEW

Needle diameter (针径) :

NO.1	
PART NO	
D	1.3
N	

Material: 防水等级:IP-X6

Waterproof adhesive防水胶	环氧树脂
o-ring O型圈	硅胶
contact pin插针	铜 (镀银)
plastic cement塑胶	PA66
Pin 引脚	铜 (镀银)
CONTACT A(P脚A)	不锈钢/铜

Main technical specifications:

Rated load(额定负荷):	DC 30V 1.5A
Contact impedance(接触阻抗):	≤30mΩ MAX
Insulation impedance(绝缘阻抗):	≥100MΩ MIN
Welding resistance temperature(耐焊温度):	250±5 ° 5s
OPERATING LIFE (电气寿命):	5,000 cycles
Usage temperature (使用温度):	-20 °C to 70 °C
Operating humidity (使用湿度):	≤85% RH
Insertion and Extraction Force(插拔力)	3~20N
	1 2
	3 4
	5 6

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	DC JACK			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	DC-118			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	ANGLE	APPROVAL	DATE	DC-09-2019
	mm	OTHERWISE	ABOVE 5 ~30				
			ABOVE 30	0°±3°	SCALE	PAGE	1 OF 1

DC-118-□