
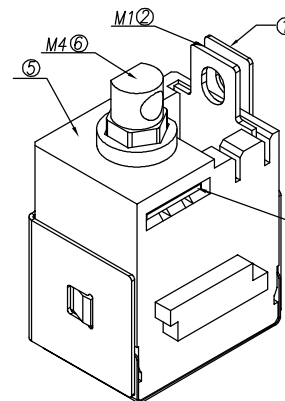
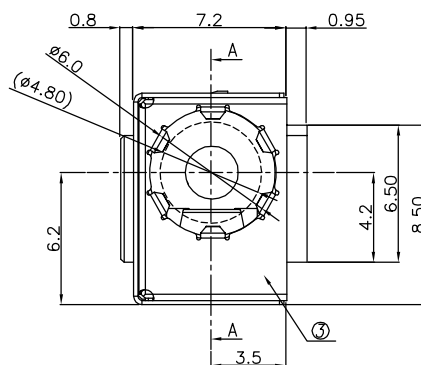


RoHS

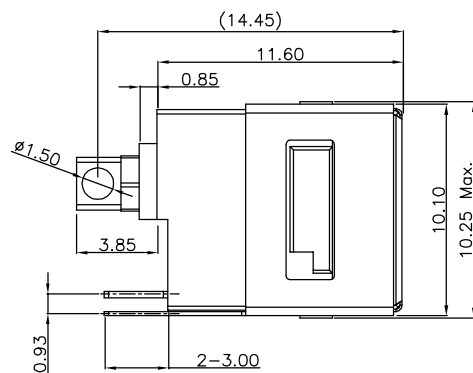

Needle diameter (针径) :

NO.1	
PART NO	
D	2.5
N	

Material:

contact pin插针	黄铜 (镀银)
plastic cement塑胶	PA66/PA46
Pin 引脚	铜 (镀银)
CONTACT A(P脚A)	铜

Main technical specifications:

Rated load(额定负荷):	DC 20V 7A
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	5,000 cycles
Usage temperature (使用温度):	-20 to 70
Operating humidity (使用湿度):	≤ 85% RH
Insertion and Extraction Force(插拔力)	3 ~ 30N

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

public errand (公差) : ±0.2mm unit (单位) : mm

PART NAME	DC JACK			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	DC-190			CHECK	Z.LIU	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	APPROVAL	DATE		DC-09-2019
				SCALE	2:1	PAGE	1 OF 1

DC-190 - □