



RoHS



SCHEMATIC



SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: 20V, 7A Min.

1-2. CONTACT RESISTANCE:


50 MILLIOHMS Max. FOR INITIAL,
80 MILLIOHMS Max. AFTER 5000 CYCLES.1-3. INSULATION RESISTANCE: 100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V
RMS AFTER 1 MINUTE.

2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)

2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)

3. LIFE TEST: 5,000 CYCLES MIN.

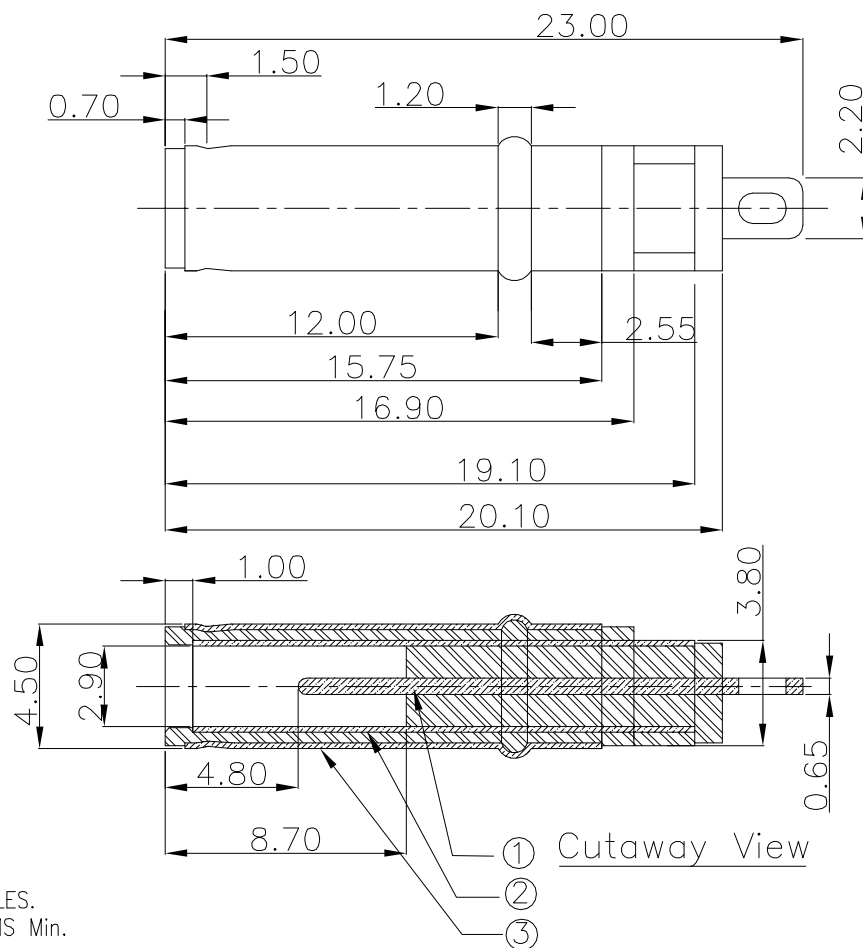

Needle diameter (针径) :

NO.1	
PART NO	
D	0.60
N	

public errand (公差) : $\pm 0.2\text{mm}$ unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

PART NAME		DC JACK				DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		DC-191G				CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	± 0.2 ± 0.3 ± 0.5 $\pm 3^\circ$	ANGLE	APPROVAL		DATE	DC-09-2019
	mm				$0^\circ \pm 3^\circ$	SCALE	2:1	PAGE	1 OF 1

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

DC-191G-□